


NEW 2016



Strong Load Bearing Capacity

Drive-Over LED Light /Stainless Steel Front Cover

- LED Colour Temperature
 - 2000K
 - 3000K
 - 6000K
- Optics
 - N/A

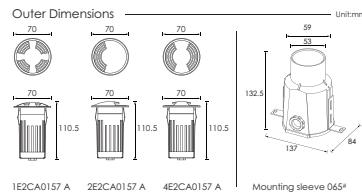


Material specifications

Housing	12" Die-casting dark grey powder coated aluminum. 1+60-80µm Adhesion of ISO class 1/ASTM class 48
Front cover	Hard chrome plated stainless steel SUS 316*
Loading capacity	>2000kg
Gasket	Molding shaped silicone seal
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m (low voltage) H05RN-F 3X1.0mm² L=0.5m (high voltage)
Mounting sleeve	Ø65* ABS plastic
Dimmable Support	Triac PWM 1-10 Dali



Item	Light source	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
1E2CA0157 A	1×3W	24V DC 120/240	24V = 108 120V = 47 240V = 28	24V = 2.5 120V = 3.0 240V = 3.0	Cool white =4.8 Warm white =4.3	10
2E2CA0157 A	1×3W	24V DC 120/240	24V = 108 120V = 47 240V = 28	24V = 2.5 120V = 3.0 240V = 3.0	Cool white =4.8 Warm white =4.3	10
4E2CA0157 A	1×3W	24V DC 120/240	24V = 108 120V = 47 240V = 28	24V = 2.5 120V = 3.0 240V = 3.0	Cool white =4.8 Warm white =4.3	10

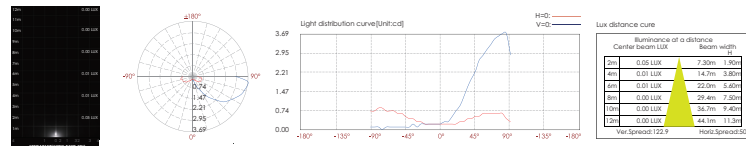


132



Strong Load Bearing Capacity

Drive-Over LED Light /Stainless Steel Front Cover

- LED Colour Temperature
 - 2000K
 - 3000K
 - 6000K
- Optics
 - N/A

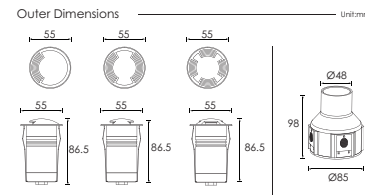


Material specifications

Housing	12" Die-casting dark grey powder coated aluminum. 1+60-80µm Adhesion of ISO class 1/ASTM class 48
Front cover	Hard chrome plated stainless steel SUS 316*
Loading capacity	>2000kg
Gasket	Molding shaped silicone seal
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m (low voltage) H05RN-F 3X1.0mm² L=0.5m (high voltage)
Mounting sleeve	Ø11* ABS
Dimmable Support	Triac PWM 1-10 Dali



Item	Light source	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
1E2WC0157	1×2W	24V DC 120/240	24V = 110 120V = 48 240V = 28	24V = 2.6 120V = 3.1 240V = 3.0	Cool white =1.5 Warm white =1.3	10
2E2WC0157	1×2W	24V DC 120/240	24V = 110 120V = 48 240V = 28	24V = 2.6 120V = 3.1 240V = 3.0	Cool white =2.0 Warm white =1.7	10
4E2WC0157	1×2W	24V DC 120/240	24V = 110 120V = 48 240V = 28	24V = 2.6 120V = 3.1 240V = 3.0	Cool white =2.0 Warm white =1.7	10

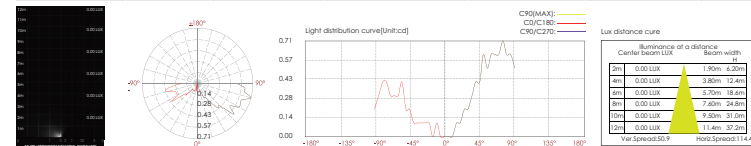

133