



RED GREEN BLUE WHITE 4 Color Mixing LED Landscape Light


LED Wave Length

- R =620-630 nm
- G =520-530 nm
- B =460-470 nm
- W =6000K


Optics

A23
L0115F038KT 15°
L0122F038KT 22°

A23



Outer Dimensions




Material specifications


Housing	12* Die-casting dark grey powder coated aluminum. T=40-60um,Adhesion of ISO class I/ASTM class 4B
Light Window	Tempered glass,T=4mm
LED	OSRAM or NICHIA
Cable gland	IP-68 PG-9 PVC
Lens	All-in-one optical lens,efficiency>85%
Bracket	Powder coated aluminum
Gasket	Tooling shaped seal
Power Cable	H05RN-F 5X0.5mm² L=2.0m

Housing color Option

Basic	Secondary
Dark Grey RAL 7037	Silver Resistant Paint RAL 9006
	Sanded Black RAL 9005



Item	Light source	Lens	The manufacturer selected lens degree(°)91/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
A3PFM0620 B	4×4W RGBW 4in1	A23	22°	24V DC	R=299 B=350 G=352 W=349	32	1000	08

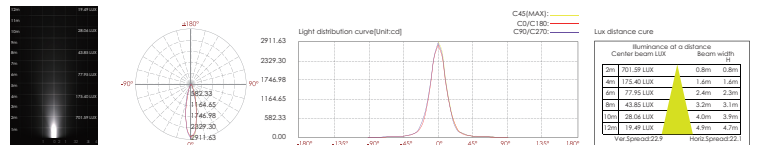

328



RED GREEN BLUE WHITE 4 Color Mixing LED Landscape Light


LED Wave Length

- R =620-630 nm
- G =520-530 nm
- B =460-470 nm
- W =6000K


Optics

A23
L0115F038KT 15°
L0122F038KT 22°

A23



Outer Dimensions



Material specifications


Housing	12* Die-casting dark grey powder coated aluminum. T=40-60um,Adhesion of ISO class I/ASTM class 4B
Light Window	Tempered glass,T=4mm
LED	OSRAM or NICHIA
Cable gland	IP-68 PG-9 PVC
Lens	All-in-one optical lens,efficiency>85%
Bracket	Powder coated aluminum
Gasket	Tooling shaped seal
Power Cable	H05RN-F 5X0.5mm² L=2.0m

Housing color Option

Basic	Secondary
Dark Grey RAL 7037	Silver Resistant Paint RAL 9006
	Sanded Black RAL 9005



Item	Light source	Lens	The manufacturer selected lens degree(°)91/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
A3PB0620 B	4×4W RGBW 4in1	A23	22°	24V DC	R=299 B=350 G=352 W=349	32	1000	08

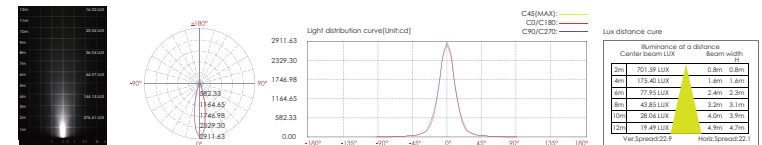

329