



NEW 2016

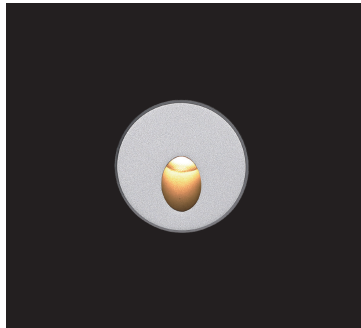


Asymmetrical Recessed LED Stair Light and Wall Light

- LED Colour Temperature
 - 2000K
 - 3000K
 - 6000K
- Optics
 - N/A


Outer Dimensions



Beam effect demo



Wall recessed







Installation with clips embedded into sleeve, fix on the concrete wall



Installation with clips directly

Item	Light source	Lens	The manufacturer selected lens degree(°)B1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
B1ADR0102	1x2W	L0180C010AR	50°	24V DC	100	2.4	Cool white =54 Warm white =49	10




76




Asymmetrical Recessed LED Stair Light and Wall Light

- LED Colour Temperature
 - 2000K
 - 3000K
 - 6000K
- Optics
 - N/A


Outer Dimensions




Beam effect demo



Wall recessed







Installation with clips embedded into sleeve, fix on the concrete wall



Installation with clips directly

Item	Light source	Lens	The manufacturer selected lens degree(°)B1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
B1ADS0102	1x2W	L0180C010AR	50°	24V DC	100	2.4	Cool white =54 Warm white =49	10



77