

NEW 2016



Recessed LED Wall Light



LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics




B38

30°

40°


Mounting sleeve characteristic



- The above picture - the supporting plate "A" is used for preventing deformation of the sleeve during the construction installation process.
- Please remove the supporting plate "A" from the mounting sleeve before the lamp installation.




Outside gear box for high voltage

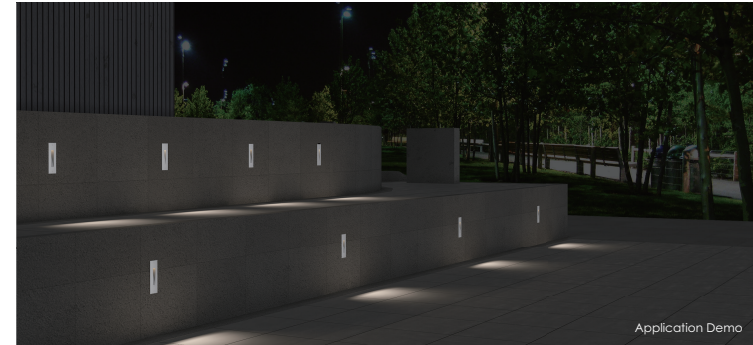

Application Demo

Outer Dimensions

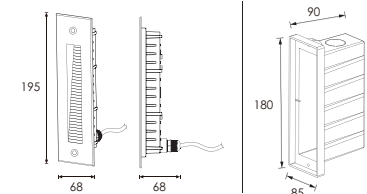


Mounting sleeve 076#

Material specifications

Housing	12" Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1 / ASTM class 48
Front cover	12" Die-casting aluminum
Light Window	Tempered glass T=2mm
Cable gland	IP-68 PG-9 PVC
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C ~ 40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m (low voltage) H05RN-F 3X1.0mm² L=0.5m (high voltage)
Mounting sleeve	ABS 076#
Dimmable Support	Triac PWM 1-10 Dim

Front Cover Color Option



Item	Light Source	Lens	The manufacturer selected lens degree (°) (1/2)	Input voltage (V)	Typical operating current (mA)	Typical consumption (W)	Typical luminance (lm)	IK Rate
B1FL0157	1X2W	B38	30°	24V DC 120/240	2.4V = 105 120V = 40 240V = 25	2.4V = 2.5 120V = 2.7 240V = 2.8	Cool white = 64 Warm white = 55	

