



Recessed LED Stair Light and Wall Light

LED Colour Temperature


2000K
3000K
6000K

Optics


N/A




Outer Dimensions



Front Cover Color Option



Item	Light source	The manufacturer selected lens degree(°)B1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D1G1807	18×SMD2835	120°	24V DC 120/240	24V = 51 120V = 34 240V = 20	24V = 1.2 120V = 1.7 240V = 1.8	Cool white =39 Warm white =34	10

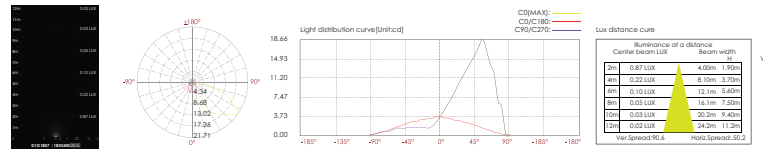

68



Recessed LED Stair Light and Wall Light

Stainless steel front cover with Matte Surface

LED Colour Temperature

• 2000K
• 3000K
• 6000K

Optics

• N/A




B1SR0101 B



B1SS0101 B

Outer Dimensions

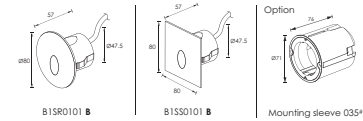


Beam effect demo




Material specifications

Housing	Molding shaped stainless-steel SUS 316L
Light Source	Emitter type power LED
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m (low voltage) H05RN-F 3X1.0mm² L=0.5m (high voltage)
Mounting sleeve	ABS 035#
Dimmable Support	Triac FWM 1-10 Dali

Front Cover Color Option



Item	Light source	Lens	The manufacturer selected lens degree(°)B1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
B1SR0101 B	1×1W	L0180C010AR	80°	24V DC 120/240	24V = 59 120V = 26 240V = 16	24V = 1.46 120V = 1.70 240V = 1.70	Cool white=34 Warm white=31	10
B1SS0101 B	1×1W	L0180C010AR	80°	24V DC 120/240	24V = 59 120V = 26 240V = 16	24V = 1.46 120V = 1.70 240V = 1.70	Cool white=34 Warm white=31	10

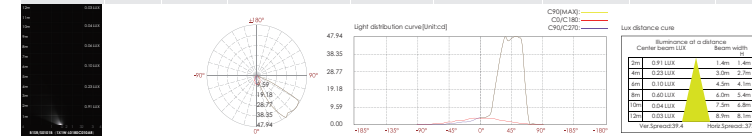

69