



Beam Direction Adjustable Inground Light

LED Colour Temperature

2000K
3000K
6000K

Optics




B15
L0115D014LK 15°
L0120D014LK 20°
L0130D014LK 30°

B15




Outer Dimensions








Mounting sleeve Ø73*

Material specifications

Housing	12° Die-casting grey powder coated aluminum. T=40-80µm Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chrome-plated Stainless steel SUS 316L*
Light Window	Tempered frosted step glass.T=6mm
Lens	Optical lens efficiency>85%
LED	OSRAM or NICHIA
Glass pressure capacity	Full area=1226kgs
Cable gland	IP-68 PG-9 PVC
Gasket	Molding shaped seal
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m(low voltage) H05RN-F 3X1.0mm² L=0.5m(high voltage)
Mounting sleeve	ABS Ø73*
Dimmable Support	Triac PWM 1-10 Dim

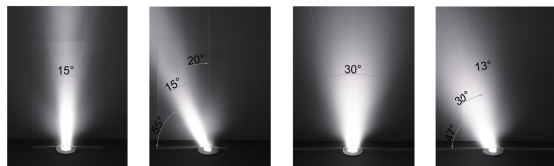

Item	Light source	Lens	The manufacturer selected lens degree(°)B1/2	Input voltage[V]	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
XB2FT0356	3x 1W	B15	20°	24V DC 120/240	2.4 V = 131 120V = 72 240V = 40	2.4 V = 3.1 120V = 4.6 240V = 4.8	Cool white =303 Warm white =224	09



Strong up light Small Size LED Inground Light


LED Colour Temperature

• 2000K
• 3000K
• 6000K




B33(B33D/B33F)
L0109P023YH 9°
L0115D023YH 15°
L0120D023YH 20°
L0130D023YH 30°
L0145D023YH 45°

B33(B33D/B33F)



Outer Dimensions



B2CAR0157 A

B2CAS0157 A

Mounting sleeve Ø14*

Material specifications

Housing	12° Die-casting grey powder coated aluminum. T=40-80µm Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chrome-plated stainless steel SUS 316*
Light Window	Tempered frosted step glass.T=5mm
LED	OSRAM or NICHIA
Glass pressure capacity	Full area=783kgs
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m(low voltage) H05RN-F 3X1.0mm² L=0.5m(high voltage)
Mounting sleeve	ABS Ø14*
Dimmable Support	Triac PWM 1-10 Dim

NEW 2016



B2CAR0157 A



B2CAS0157 A

Item	Light source	Lens	The manufacturer selected lens degree(°)B1/2	Input voltage[V]	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
○ B2CAR0157 A	1x3W	B33	30°	24V DC 120/240	24V = 155 120V = 61 240V = 34	24V = 3.7 120V = 4.3 240V = 4.3	Cool white =305 Warm white =267	08
□ B2CAS0157 A	1x3W	B33	30°	24V DC 120/240	24V = 155 120V = 61 240V = 34	24V = 3.7 120V = 4.3 240V = 4.3	Cool white =305 Warm white =267	08

