



Diffuser Tiny Type LED Inground Light Stainless Steel Front Cover

LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics

- N/A




D2YBR0134



D2YBS0134


Outer Dimensions



Material specifications

Housing	12° Die-casting grey powder coated aluminum, T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chromeplated Stainless steel SUS 316L*
Light Window	Tempered frosted step glass, T=5mm
LED	OSRAM or NICHIA
Glass pressure capacity	Full area=254kgs
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m(low voltage)
Mounting sleeve	ABS 032°
Dimmable Support	Triac PWM 1-10 Dim

Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
○ D2YBR0134	1 × 0.5W NICHIA	24V DC	26	0.6	Cool white = 11.0 Warm white = 9.60	06
□ D2YBS0134	1 × 0.5W NICHIA	24V DC	26	0.6	Cool white = 11.0 Warm white = 9.60	06

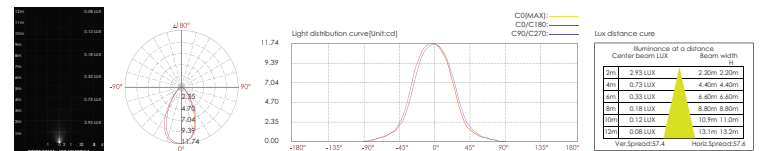

Up light Tiny Type LED Inground Light Stainless Steel Front Cover

LED Colour Temperature


- 2000K
- 3000K
- 6000K

Optics


- B27
- 01000011V 9°
- 010100011V 13°
- 010200011V 25°
- 010300011V 30°



B27



Outer Dimensions



Material specifications

Housing	12° Die-casting grey powder coated aluminum, T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chromeplated Stainless steel SUS 316L*
Light Window	Tempered frosted step glass, T=5mm
LED	OSRAM or NICHIA
Glass pressure capacity	Full area=254kgs
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m(low voltage)
Mounting sleeve	ABS 033°
Dimmable Support	Triac PWM 1-10 Dim

Item	Light source	The manufacturer selected lens degree(°)B1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
○ B2YCR0157	1 × 2.0W OSRAM	25°	24V DC	110	2.5	Cool white = 120 Warm white = 135	06

