



High Power RGB LED Garden Light


LED Wave Length

- R =620-630 nm
- G =520-530 nm
- B =460-470 nm

Optics



Outer Dimensions



B3AB0106


Material specifications

Front cover & Housing	Aluminum anodized finishing or powder painting
lens	Optical lens,efficiency>85%
Light Window	Tempered glass,T=3mm
Cable gland	Nickel coated copper
Gasket	Tooling shaped seal
LED	IQ type power LED
PCB	Excellent heat conductivity aluminum,coefficient of heat Conductivity>2.0w/mk
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 4X0.75mm² L=2.0m

Housing color Option



Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
B3AB0106	1×3W RGB 3in1 Full color	B34D	30°	24V DC	R = 38 G = 53 B = 54	3.5	50	02

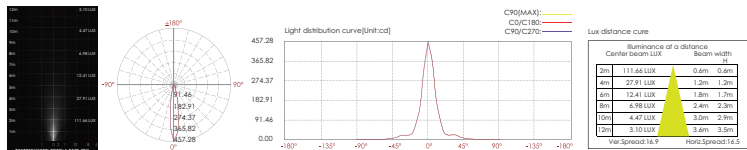

High Power RGB LED Garden Light


LED Wave Length

- R =620-630 nm
- G =520-530 nm
- B =460-470 nm

Optics



Outer Dimensions

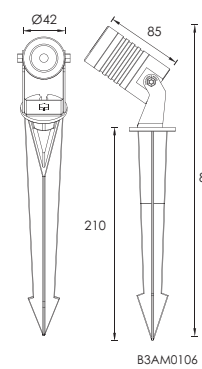

B3AM0106

Material specifications

Front cover & Housing	Aluminum anodized finishing or powder painting
lens	Optical lens,efficiency>85%
Light Window	Tempered glass,T=3mm
Cable gland	Nickel coated copper
Gasket	Tooling shaped seal
LED	IQ type power LED
PCB	Excellent heat conductivity aluminum,coefficient of heat Conductivity>2.0w/mk
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 4X0.75mm² L=2.0m

Housing color Option



Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
B3AB0106	1×3W RGB 3in1 Full color	B34D	30°	24V DC	R = 38 G = 53 B = 54	3.5	50	02

