



## Asymmetrical Wall Mounting Wall Washer

### LED Colour Temperature

2000K  
3000K  
6000K



### Optics



### C9




### Outer Dimensions




### Material specifications

|                  |                                                                                              |
|------------------|----------------------------------------------------------------------------------------------|
| Housing          | 12# Die-casting powder coated aluminum .<br>T=60-80µm. Adhesion of ISO class I/ASTM class 4B |
| Bracket          | Powder coated aluminum                                                                       |
| Light Window     | Tempered glass. T=4mm                                                                        |
| Reflector        | Optical Reflector efficiency≥90%                                                             |
| LED              | OSRAM or NICHIA                                                                              |
| Cable gland      | IP-68 PG-9 PVC                                                                               |
| Gasket           | Tooling shaped seal                                                                          |
| Power cable      | 24V: H05RN-F 2×1.0mm² L=2M(Single)<br>100/240V: H05RN-F 3×1.0mm² L=2M(Single)                |
| Dimmable Support | Tiaco PWM 1-10 Volt                                                                          |

### Housing color Option



| Item        | Light source | Lens | The manufacturer selected lens degree(°)B1/2 | Input voltage(V)   | Typical operating current(mA)           | Typical consumption(W)                     | Typical luminance(lm)                  | IK rate |
|-------------|--------------|------|----------------------------------------------|--------------------|-----------------------------------------|--------------------------------------------|----------------------------------------|---------|
| C3PFM1257 U | 12×1.5W      | C9   | 45°<br>35°                                   | 24V DC<br>120V/240 | 2.4 V = 1050<br>120V = 143<br>240V = 79 | 2.4 V = 25.0<br>120V = 18.0<br>240V = 18.0 | Cool white = 1818<br>Warm white = 1373 | 08      |

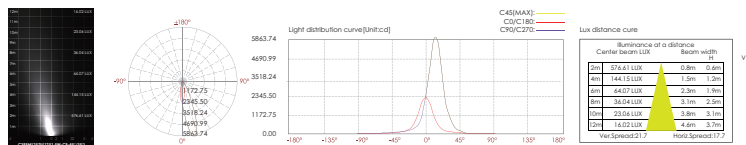

192




## Architectural and Landscape Spot Light


### LED Colour Temperature

• 2000K  
• 3000K  
• 6000K


### Optics




### B33(B33D/B33F)



### Outer Dimensions




### Housing color Option



### Material specifications

|                  |                                                                                              |
|------------------|----------------------------------------------------------------------------------------------|
| Housing          | 12# Die-casting powder coated aluminum .<br>T=60-80µm. Adhesion of ISO class I/ASTM class 4B |
| Light Window     | Tempered glass. T=4mm                                                                        |
| Cable gland      | IP-68 PG-9 PVC                                                                               |
| Gasket           | Tooling shaped seal                                                                          |
| Bracket          | Powder coated aluminum                                                                       |
| LED              | OSRAM or NICHIA                                                                              |
| Lens             | Optical lens efficiency≥90%                                                                  |
| Power cable      | H05RN-F 2×1.0mm² L=2.0m(low voltage)<br>H05RN-F 3×1.0mm² L=2.0m(high voltage)                |
| Dimmable Support | Tiaco PWM 1-10 Volt                                                                          |

| Item      | Light source | Lens | The manufacturer selected lens degree(°)B1/2 | Input voltage(V)  | Typical operating current(mA)           | Typical consumption(W)               | Typical luminance(lm)                | IK rate |
|-----------|--------------|------|----------------------------------------------|-------------------|-----------------------------------------|--------------------------------------|--------------------------------------|---------|
| B3PFM1257 | 12×2W        | B33D | 20°                                          | 24V DC<br>120/240 | 2.4 V = 1051<br>120V = 143<br>240V = 79 | 2.4 V = 25<br>120V = 17<br>240V = 18 | Cool white =2573<br>Warm white =2329 |         |

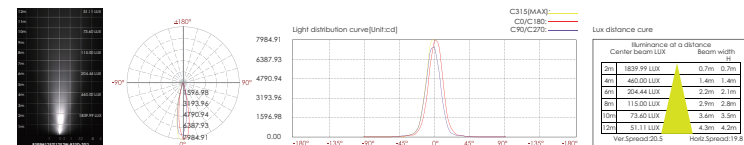

193