



Wall Mounting RGB LED Underwater Light

Completely Hard Chromeplated
Stainless Steel SUS 316&316L# Housing and Accessory

LED Wave Length

- R =620-630 nm
- G =520-530 nm
- B =460-470 nm

Optics




B8
L021SD023KP 25°

B8



25°

Outer Dimensions




Warning:
Must be installed under the water to prevent the light from burning up because of over-heating.

Material specifications

Housing	Hard chromeplated Molding shaped stainless steel SUS 316L*
Front cover	Hard chromeplated Stainless steel SUS 316L*
Light Window	Step tempered glass,T=8mm
Waterproof seal	Silicone Gasket
Lens	Separate optical lens efficiency>85%
Cable gland	IP-68 PG-11 copper with nickel-coated
PCB	Excellent heat conductivity aluminum,coefficient of heat Conductivity>2.0w/mk
LED Driver	Constant Voltage Input,Constant Current Output
Power Cable	H07RN-F 4X1.0mm² L=3.0m
Application environment	Temperature of water between -20℃~40℃ less than 1 meter depth.



Item	Light source	Lens	The manufacturer selected lens degree(°)91/2	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
B480618	6×2W RGB 3in1 Full color	B8	25°	24V DC	R = 200 G = 250 B = 250	16.8	428	09

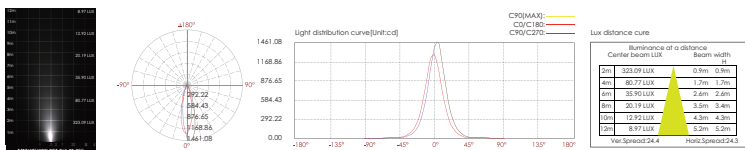

376



Central Ejective RGB LED Fountain Light

Completely Stainless Steel SUS 316#&316L Housing and Accessory

LED Wave Length

- R =620-630 nm
- G =520-530 nm
- B =460-470 nm

Optics




B8
L021SD023KP 25°

B8



25°

Outer Dimensions




Warning:
Must be installed under the water to prevent the light from burning up because of over-heating.

Material specifications

Housing	Hard chromeplated Molding shaped stainless steel SUS 316L*
Front cover	Hard chromeplated Stainless steel sus 316L*
Light Window	Step tempered glass,T=8mm
Gasket	Silicone Gasket
Cable gland	IP-68 PG-11 copper with nickel-coated
PCB	Excellent heat conductivity aluminum, coefficient of heat Conductivity>2.0w/mk
LED Driver	Constant Voltage Input,Constant Current Output
Power Cable	H07RN-F 4X1.0mm² L=3.0m
Application environment	Temperature of water between -20℃~40℃ less than 1 meter depth.



Item	Light source	Lens	The manufacturer selected lens degree(°)91/2	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
B45B0918	9×2W RGB 3in1 Full color	B8	25°	12V DC	R = 600 G = 750 B = 750	25.2	774	09

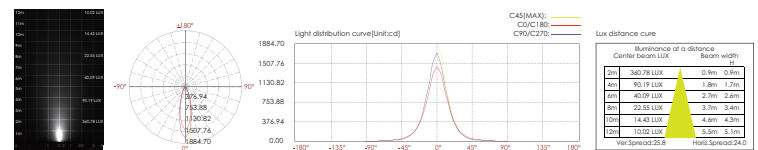

377