



Central Ejective RGB LED Fountain Light

Completely Stainless Steel SUS 316# Housing and Accessory

LED Wave Length

- R =620-630 nm
- G =520-530 nm
- B =460-470 nm

Optics




B8



25°

Outer Dimensions




Warning:
Must be installed under the water to prevent the light from burning up because of over-heating.

Material specifications

Housing	Hard chromeplated Molding shaped stainless steel sus 316#
Light Window	Step tempered glass.T=10mm
Gasket	Silicone Gasket
Cable gland	IP-68 PG-11 copper with nickel-coated
PCB	Excellent heat conductivity aluminum,coefficient of heat Conductivity2.0w/mk
LED Driver	Constant Voltage Input,Constant Current Output
Power Cable	H07RN-F 4X1.0mm² L=3.0m
Application environment	Temperature of water between -20°C-40°C less than 1 meter depth.



Item	Light source	Lens	The manufacturer selected lens degree(°)91/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
B4TA1218	12x2W RGB 3in1 Full color	B8	25°	24V DC	R = 400 G = 500 B = 500	33.6	726	09

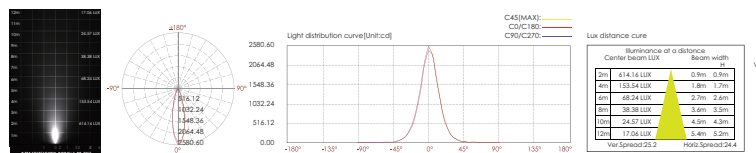

372



Central Ejective RGB LED Fountain Light

Completely Stainless Steel SUS 316# Housing and Accessory

LED Wave Length

- R =620-630 nm
- G =520-530 nm
- B =460-470 nm

Optics




B8




25°

Outer Dimensions




Warning:
Must be installed under the water to prevent the light from burning up because of over-heating.

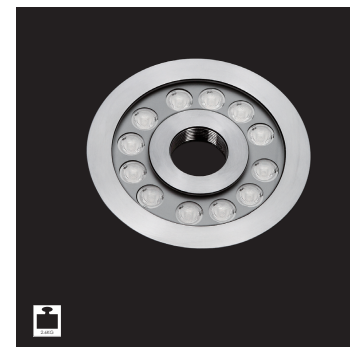


Material specifications

Housing	Hard chromeplated Molding shaped stainless steel SUS 316#
Light Window	Step tempered glass.T=10mm
Gasket	EPDM gasket
Cable gland	IP-68 PG-11 copper with nickel-coated
PCB	Excellent heat conductivity aluminum,coefficient of heat Conductivity2.0w/mk
LED Driver	Constant Voltage Input,Constant Current Output
Power Cable	H07RN-F 4X1.0mm² L=3.0m
Application environment	Temperature of water between -20°C-40°C less than 1 meter depth.



Item	Light source	Lens	The manufacturer selected lens degree(°)91/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
B4TB1218	12x3W RGB 3in1 Full color	B8	25°	24V DC	R = 400 G = 500 B = 500	33.6	726	09

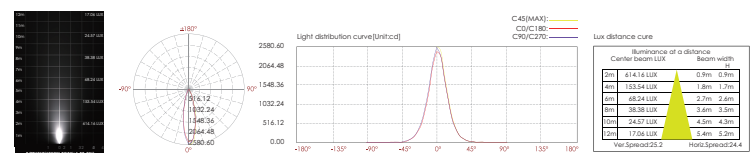

373