

High Power LED Linear Wall Washer



LED COLOUR TEMPERATURE

2700K · 3000K · 6500K

OPTICS



B33
(B33D/B33F)



9°(B33F)
L0109F023YH



10°
L0115D023YH



20°
L0120D023YH



30°
L0130D023YH



45°
L0145D023YH




60°
L0160D023MD


OUTER DIMENSIONS & ACCESSORIES

Unit:mm

Low voltage input (24VDC)




B6QB1057




B6QB2057

High voltage input (100V-240V)



B6QC1057




B6QC2057


MATERIAL SPECIFICATIONS

- HOUSING** | Extruded aluminum,powder coated
- LENS** | Optical lens, efficiency≥85%
- LIGHT WINDOW** | Tempered glass, T=3mm
- CABLE GLAND** | IP68 PG-11 PA66
- SEALE** | Glass and housing are silicone sealed
- LED** | OSRAM SMD 3030
- OPERATING TEMPERATURE** | -20°C~50°C
- BRACKET** | 12# Die-casting powder coated aluminum
- POWER CABLE** | H05RN-F 2X1.5mm2 L=0.25m (low voltage)
H05RN-F 3X1.0mm2 L=0.5m (high voltage)
- DIMMABLE SUPPORT** | Triac PWM 1-10V Dali (B6QB1057/B6QB2057)


Low voltage input (24VDC) power cord model

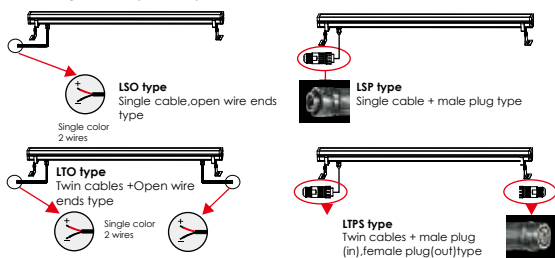

High voltage input (100V-240V) power cord wiring model



OPTIONAL HONEYCOMB LOUVER



• Air Valve



• Cap-Optional Accessory



• Adjustable beam direction

TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	LENGTH(MM)	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
B6QB1057	10 LED Single color	B33D	10°/30°/60°	600	24V DC	1041	15	4000K,6500K =115lm/W 2700K,3000K =115lm/W	09
B6QB2057	20 LED Single color	B33D	10°/30°/60°	1200	24V DC	2056	25	4000K,6500K =115lm/W 2700K,3000K =115lm/W	09
B6QC1057	10 LED Single color	B33D	10°/30°/60°	600	120/240	120V = 174 240V = 92	120V = 20.8 240V = 20.8	4000K,6500K =115lm/W 2700K,3000K =115lm/W	09
B6QC2057	20 LED Single color	B33D	10°/30°/60°	1200	120/240	120V = 374 240V = 202	120V = 31 240V = 32.2	4000K,6500K =115lm/W 2700K,3000K =115lm/W	09

PHOTOMETRIC CURVES

