


Slim Type LED Linear Wall Washer



LED COLOUR TEMPERATURE

2700K · 3000K · 6500K



OPTICS





OUTER DIMENSIONS & ACCESSORIES

Unit:mm

Low voltage input (24VDC)




High voltage input (100V-240V)

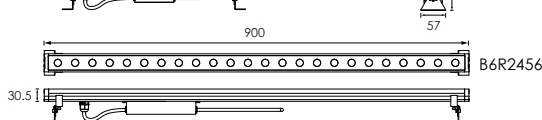

MATERIAL SPECIFICATIONS

HOUSING	I Extruded aluminum,powder coated
LENS	I Optical lens, efficiency≥85%
LIGHT WINDOW	I Step tempered glass,T=4mm
CABLE GLAND	I IP68 PG-9 PA66
GASKET	I Glass and housing are silicone sealed
LED	I OSRAM SMD3030
OPERATING TEMPERATURE	I -20°C~50°C
BRACKET	I Hard chromeplatedstainless steel SUS 304# T=1.5mm
POWER CABLE	I 2XH05RN-F 2X1.0mm2 L=0.5m(low voltage) I 2XH05RN-F 3X1.0mm2 L=0.5m(high voltage)
DIMMABLE SUPPORT	I Triac PWM 1-10V Dali


Low voltage input (24VDC) power cord model

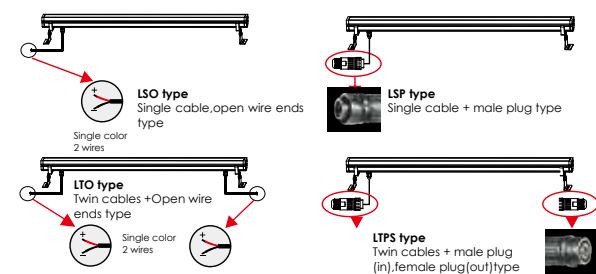


High voltage input (100V-240V) power cord wiring model



OPTIONAL PARTS

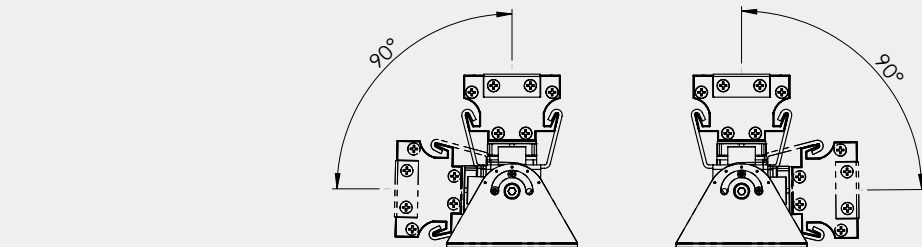

•Adjustable beam direction



•Air Valve



•Cap-Optional Accessory

TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	LENGTH(MM)	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
B6R0656	6 LED Single color	B17	10°/30°/60°	265	24V DC 120/240	24V = 305 120V = 100 240V = 55	24V = 7.5 120V = 7.2 240V = 7.3	4000K,6500K = 115lm/W 2700K,3000K = 115lm/W	09
B6R1256	12 LED Single color	B17	10°/30°/60	510	24V DC 120/240	24V = 610 120V = 130 240V = 65	24V = 14.5 120V = 15 240V = 15	4000K,6500K = 115lm/W 2700K,3000K = 115lm/W	09
B6R2456	24 LED Single color	B17	10°/30°/60	900	24V DC 120/240	24V = 1220 120V = 295 240V = 163	24V = 29 120V = 25 240V = 25	4000K,6500K = 115lm/W 2700K,3000K = 115lm/W	09

PHOTOMETRIC CURVES

