




Small Type Wall Mounting Landscape Light



B3ZA0156



B7ZA0256

LED Colour Temperature


- 2000K
- 3000K
- 6000K

Optics




B17
L0115D020ME 15°
L0120D020ME 20°
L0130D020ME 30°
L0150D020ME 50°


B17




Adjustable beam direction




B3ZA0156

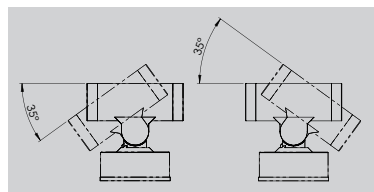

B7ZA0256

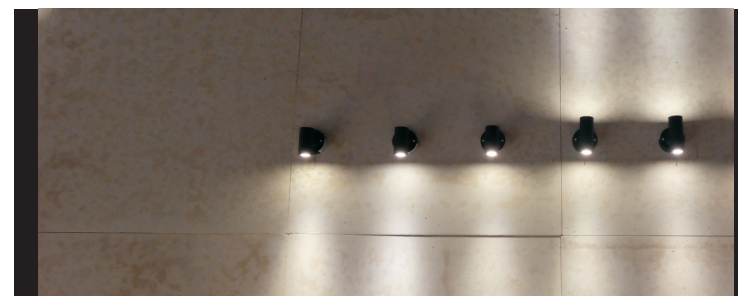

Outer Dimensions



Material specifications

Housing	12" Die-casting dark grey powder coated aluminum. T=60-80µm. Adhesion of ISO class 1/ASTM class 48
Lens	Optical lens, efficiency 85%
PC cover	UV-Resistance PC, T=3.5mm
LED Driver	Constant Voltage Input, Constant Current Output
Cable gland	IP-68 PG-9 PVC
PCB	Excellent heat conductivity aluminum, coefficient of heat conductivity 22.0w/mk
LED	OSRAM or NICHIA
Operating temperature	-20°C~40°C
Power Cable	AWM 1A 105°C 600V 18AWG FT1L=300mm
Mounting base	Powder coated die-casting aluminum
Dimmable Support	Triac PWM 1-10 Dim

Housing color option

