




LED Colour Temperature	Optics	C11
<ul style="list-style-type: none"> 2000K 3000K 6000K 		



Outer Dimensions	Material specifications
<p>Mounting sleeve 076*</p>	<p>Housing: 12μ Die-casting grey powder coated aluminum T=60-80um Adhesion of 5D class 1/ASTM class 4B</p> <p>Light Window: Step tempered glass, 1=8mm</p> <p>Cable gland: IP-68 PG-9 PVC</p> <p>Gasket: Tooling shaped seal</p> <p>LED Driver: Constant Voltage Input/Constant Current Output</p> <p>Operating temperature: -20°C~40°C</p> <p>Power Cable: H05RN-F 2X1.0mm² L=0.5m (low voltage) H05RN-F 3X1.0mm² L=0.5m (high voltage)</p> <p>Mounting sleeve: ABS 076*</p> <p>Dimmable Support: Triac PWM 1-10 Dim</p>

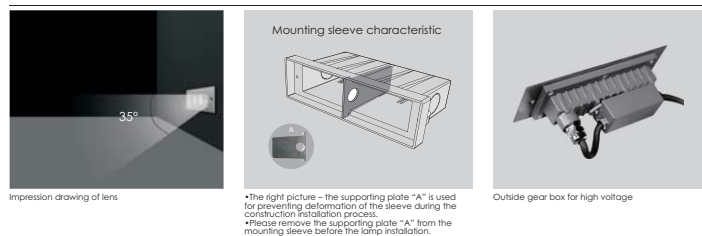