



Asymmetrical Recessed Linear Inground Wall Washer Lamp

LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics



C11



45°
35°

Outer Dimensions Unit:mm



Mounting sleeve 077*




Low voltage type



Outside gear box
for high voltage


Mounting sleeve characteristic



1.The above picture – the supporting plate "A1" and "A2" are used for preventing deformation of the sleeve during the construction installation process.

2.Please remove the supporting plate "A1" and "A2" from the mounting sleeve before the lamp installation.

Item	Light source	Lens	The manufacturer selected lens degree(°)B1/2	Weight (kg)	Input voltage[V]	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
C2FL0657	6×2W	C11	45° 35°	1.6	24V DC 120/240	24V = 550 120V = 100 240V = 57	24V = 13.2 120V = 11.8 240V = 12.1	Cool white =875 Warm white =570	08

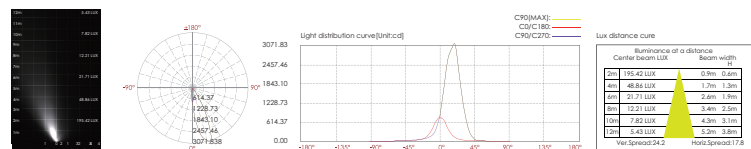

142



Asymmetrical Recessed Linear Inground Wall Washer Lamp

LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics




C11



45°
35°

Outer Dimensions Unit:mm



Mounting sleeve 076*




Low voltage type



Outside gear box
for high voltage


Mounting sleeve characteristic



1.The right picture – the supporting plate "A" is used for preventing deformation of the sleeve during the construction installation process.

2.Please remove the supporting plate "A" from the mounting sleeve before the lamp installation.

Item	Light source	Lens	The manufacturer selected lens degree(°)B1/2	Weight (kg)	Input voltage[V]	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
C2FL0357	3×2W	C11	45° 35°	0.9	24V DC 120/240	24V = 240 120V = 89 240V = 46	24V = 5.70 120V = 6.00 240V = 5.70	Cool white =340 Warm white =285	08

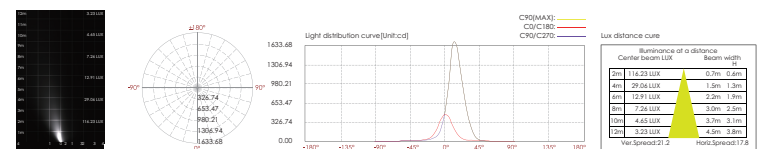

143