



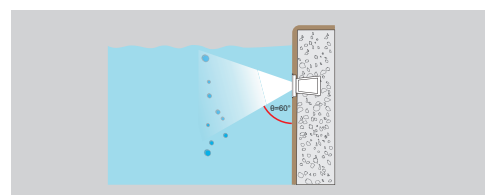

Wall Recessed LED Pool Light

Completely Hard chromeplated Stainless Steel SUS 316L# Housing and Accessory

LED Colour Temperature	Optics
2000K 3000K 6000K	B27 L0109D021YT 9° L0113D021YT 13° L0125D021YT 25° L0130D021YT 30°




Water must be allowed to go inside and outside sleeve freely without leaking to the other side.

Warning:
Must be installed under the water to prevent the light from being burnt off because of over-heating.



Outer Dimensions



Material specifications

Front cover & Housing	Hard chromeplated molding shaped stainless steel SUS 316#
Front plate	Hard chromeplated stainless steel SUS 316#
Light Window	Step tempered glass,T=9mm
Gasket	Silicone Gasket
Lens	Optical lens,efficiency>85%
PCB	Excellent heat conductivity aluminum,coefficient of heat Conductivity22.0w/mk
LED Driver	Constant Voltage Input,Constant Current Output
Power Cable	H07RN-F 2X1.0mm² L=3.0m
Application environment	Temperature of water between -20°C~40°C less than 1 meter depth
Cable gland	IP-68 PG-11 copper with nickel-coated
Mounting sleeve	ABS C39#
Dimmable Support	Triac PWM 1-10 Dali

Item	Light source	Lens	The manufacturer selected lens degree(°)91/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK Rate
B4TL0657	6×2W	B27	30°	24V DC	500	12	Cool white=808 Warm white=688	08

