



NEW 2016



Recessed LED Stair & Wall Light

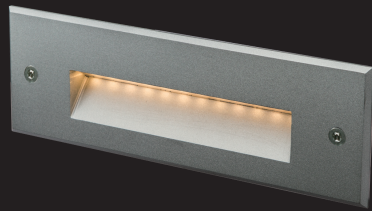


Outer Dimensions

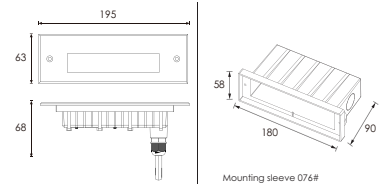


Material specifications

Housing	12" Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class I/ASTM class 48
Front cover	12" Die-casting aluminum
Light Window	Tempered glass T=2mm
Cable gland	IP-68 PG-9 PVC
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m (low voltage) H05RN-F 3X1.0mm² L=0.5m (high voltage)
Mounting sleeve	ABS 076#
Dimmable Support	Triac PWM 1-10 Dali

Front Cover Color Option



Item	Light Source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK Rate
D1FL1234	12X0.2	N/A	120°	24V DC 120/240	2.4V = 110 120V = 57 240V = 32	2.4V = 2.6 120V = 3.5 240V = 3.5	Cool white =138 Warm white =118	10

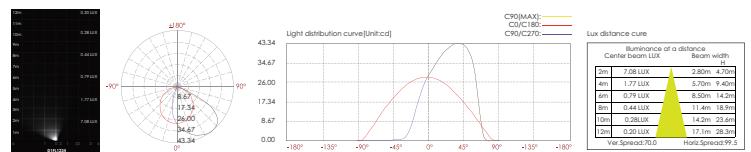


6

Recessed LED Stair Light & Wall Light




Outer Dimensions

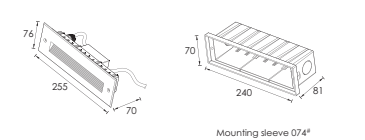


Material specifications

Housing & Front cover	12" Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class I/ASTM class 48
Light Window	PC T=3mm
Cable gland	IP-68 PG-9 PVC
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m (low voltage) H05RN-F 3X1.0mm² L=0.5m (high voltage)
Mounting sleeve	ABS 074#
Dimmable Support	Triac PWM 1-10 Dali

Front Cover Color Option



Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D1BA1517	15×SMD3030	24V DC 120/240	24V = 200 120V = 90 240V = 52	24V = 4.8 120V = 6.4 240V = 6.5	Cool white =99 Warm white =92	10

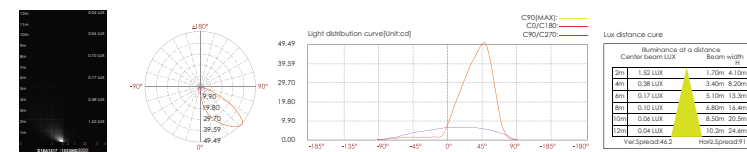

7