



#### LED Colour Temperature

- 2000K
- 3000K
- 6000K


#### Optics

N/A

#### Material specifications

Housing	12" Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 48
Front cover	Hard chrome-plated Stainless steel 316"
Light Window	PC T=3mm
Cable gland	IP-68 PG-9 PVC
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm <sup>2</sup> L=0.5m (low voltage) H05RN-F 3X1.0mm <sup>2</sup> L=0.5m (high voltage)
Mounting sleeve	ABS 074"
Dimmable Support	Triac PWM 1-10 Dali

#### Outer Dimensions

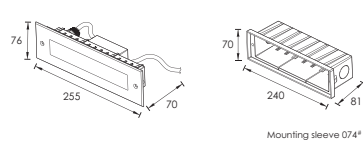


Mounting sleeve 074"




#### Mounting sleeve characteristic

The right picture-"A" is the supporting plate, used for "mounting sleeve" during the construction installation process to prevent deformation of the sleeve.

The loading way such as A1, A2. Please take out the supporting plate (A1 & A2) from the "mounting box" before installation.



Item	Light source	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
D18D5407	54 x SMD 2835	24V DC 120V/240	24V = 220 120V = 95 240V = 53	24V = 5.3 120V = 6.7 240V = 6.8	Cool white = 141 Warm white = 132	09



### Recessed LED Diffused Beam Stair Light and Wall Light Stainless Steel Front Cover

#### LED Colour Temperature


- 2000K
- 3000K
- 6000K

#### Optics

• N/A



#### Outer Dimensions

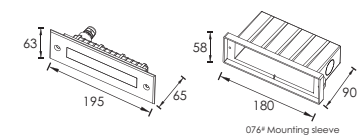

076" Mounting sleeve


#### Material specifications

Housing	12" Die-casting grey powder coated aluminum. T=60-80um Adhesion of ISO class 1/ASTM class 48
Front cover	Hard chrome-plated stainless steel SUS 316L"
Light Window	Step tempered glass, T=8mm
Cable gland	IP-68 PG-9 PVC
Gasket	Tooling shaped seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm <sup>2</sup> L=0.5m (low voltage) H05RN-F 3X1.0mm <sup>2</sup> L=0.5m (high voltage)
Mounting sleeve	ABS 076"
Dimmable Support	Triac PWM 1-10 Dali

#### Mounting sleeve characteristic

\*The Right picture - the supporting plate "A" is used for preventing deformation of the sleeve during the construction installation process.

\*Please remove the supporting plate "A" from the mounting sleeve before the lamp installation.



Item	Light source	The manufacturer selected lens degree(°)Ø1/2	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
D1FL1014	10 x SMD3030	120°	24V DC 120/240	24V = 50 120V = 27 240V = 17	24V = 1.2 120V = 1.7 240V = 1.8	Cool white = 34 Warm white = 22	09

