



Recessed LED Soft Beam Stair Light and Wall Light




Application Demo

LED Colour Temperature


- 2000K
- 3000K
- 6000K

Optics

- N/A

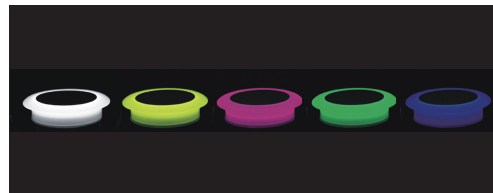

Outer Dimensions

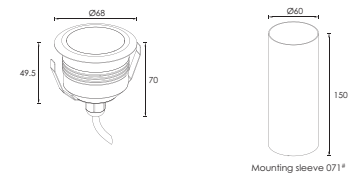

Material specifications

Housing	12" Die-casting grey powder coated aluminum, 1-60-80um Adhesion of ISO class 1/ASTM class 48
Beam windows	50% transmittance PC cover
Waterproof seal	Rubber seal
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m(low voltage) H05RN-F 3X1.0mm ² L=0.5m(high voltage)
Mounting sleeve	ABS 071*
Dimmable Support	Triac PWM 1-10 Dali

Item	Light source	Input voltage[V]	Typical operating current[mA]	Typical consumption[w]	Typical luminance[lm]	IK rate
D1B00136	1 x 2W	24V DC 120/240	24V = 110 120V = 46 240V = 26	24V = 2.6 120V = 2.8 240V = 2.9	Cool white =19 Warm white =20	09

