


NEW 2016



Recessed LED Wall Light




Outer Dimensions




Material specifications

Housing	12" Die-casting grey powder coated aluminum, T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	12" Die-casting aluminum, RAL7037 powder coated T=60-80um Adhesion of ISO class 1/ASTM class 4B
LED	SMD3030 type LED
Cable gland	IP-67 copper and nicked coated
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m (low voltage) H05RN-F 3X1.0mm² L=0.5m (high voltage)
Mounting sleeve	ABS 090°
Dimmable Support	Triac PWM 1-10 Dim

Front Cover Color Option



Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D1CB1834	18x0.3W	24V DC 120 / 240	24V = 235 120V = 97 240V = 54	24V = 5.5 120V = 6.8 240V = 6.9	Cool white =67.0 Warm white =61.0	09

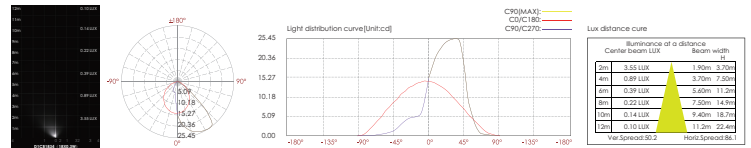

40

NEW 2016




Diffused Beam Recessed LED Wall Light

Stainless steel front cover with Matte Surface




Outer Dimensions

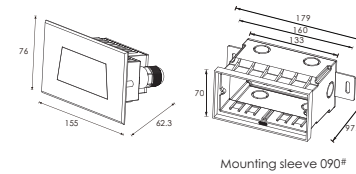

Material specifications

Housing	12" Die-casting grey powder coated aluminum, T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chromeplated Stainless steel 316*
LED	SMD3030 type LED
Cable gland	IP-67 copper and nicked coated
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m (low voltage) H05RN-F 3X1.0mm² L=0.5m (high voltage)
Mounting sleeve	ABS 090°
Dimmable Support	Triac PWM 1-10 Dim

Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D1CD1834	18x0.2W	24V DC 120/240	24V = 125 120V = 56 240V = 29	24V = 3.0 120V = 3.4 240V = 3.5	Cool white =53 Warm white =53	09

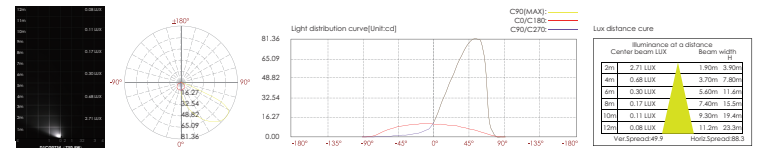

41