


NEW 2016



Recessed LED Wall Light




Outer Dimensions



Material specifications

Housing	12" Die-casting grey powder coated aluminum. T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	12" Die-casting aluminum RAL7037 powder coated T=20-30um Adhesion of ISO class 1/ASTM class 4B
LED	SMD3030 type LED
Cable gland	IP-67 copper and nickel coated
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	ABS 091*
Dimmable Support	Triac PWM 1-10 Dim

Front Cover Color Option



Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
D1FG1834	18x0.2W	24V DC 120/240	24V = 240 120V = 103 240V = 57	24V = 5.5 120V = 7.0 240V = 7.0	Cool white =58.0 Warm white =45.6	10
D1FH1834	18x0.2W	24V DC 120/240	24V = 230 120V = 103 240V = 57	24V = 5.5 120V = 7.0 240V = 7.0	Cool white =54.8 Warm white =45.6	10

18


NEW 2016



Recessed LED Stair Light and Wall Light




Outer Dimensions

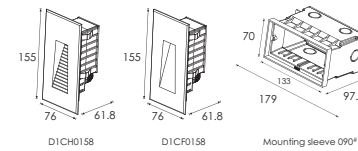

Material specifications

Housing	12" Die-casting grey powder coated aluminum. T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	12" Die-casting aluminum RAL7037 powder coated T=20-30um Adhesion of ISO class 1/ASTM class 4B
LED	SMD3030 type LED
Cable gland	IP-67 copper and nickel coated
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	ABS 090*
Dimmable Support	Triac PWM 1-10 Dim

Front Cover Color Option



Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
D1CH0158	1x3W	24V DC 120/240	24V = 140 120V = 67 240V = 37	24V = 3.3 120V = 4.2 240V = 4.4	Cool white =64 Warm white =55	10
D1CF0158	1x3W	24V DC 120/240	24V = 140 120V = 67 240V = 37	24V = 3.3 120V = 4.2 240V = 4.4	Cool white =64 Warm white =55	10

19