


NEW 2016



LED Recessed Wall Light




Outer Dimensions

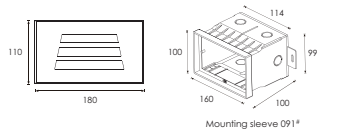


Material specifications

Housing	12" Die-casting grey powder coated aluminum. T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	12" Die-casting aluminum RAL7037 powder coated T=60-80um Adhesion of ISO class 1/ASTM class 4B
LED	SMD3030 type LED
Cable gland	IP-67 copper and nicked coated
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input.Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	ABS Ø91*
Dimmable Support	Triac PWM 1-10 Dim

Front Cover Color Option



Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D1FB3634	36x0.1W	24V DC 120 / 240	24V = 235 120V = 100 240V = 55	24V = 5.5 120V = 6.7 240V = 6.6	Cool white =52.8 Warm white =46.7	09

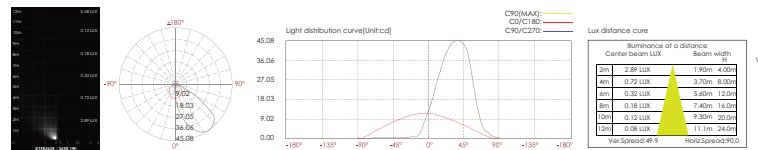

30


NEW 2016



Diffused Beam Recessed LED Wall Light Stainless steel front cover with Matte Surface




Outer Dimensions

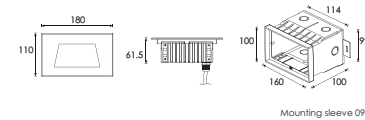

Material specifications

Housing	12" Die-casting grey powder coated aluminum. T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chromeplated Stainless steel 316*
LED	SMD3030 type LED
Cable gland	IP-67 copper and nicked coated
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input.Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	ABS Ø91*
Dimmable Support	Triac PWM 1-10 Dim

Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D1FD3634	36x0.1W	24V DC 120/240	24V =235 120V=100 240V=55	24V =5.5 120V=6.7 240V=6.6	Cool white =52.8 Warm white =46.7	09

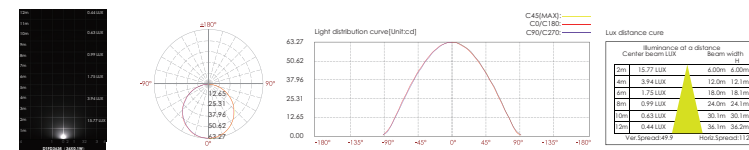

31