


**Stainless steel front cover with Matte Surface**



### Outer Dimensions




Mounting sleeve 091 #

### Material specifications -

|                       |                                                                                                         |
|-----------------------|---------------------------------------------------------------------------------------------------------|
| Housing               | 12" Die-casting grey powder coated aluminum<br>T-6080 Adhesion of ISO class 1/ASTM class A8             |
| Front cover           | Hard chrome-plated Stainless steel 316 <sup>1</sup>                                                     |
| LED                   | <b>SMD3030</b> type LED                                                                                 |
| Cable gland           | IP-67 copper and nickel coated                                                                          |
| Gasket                | Molding shroud silicone seal                                                                            |
| LED Driver            | Constant Voltage Input, Constant Current Output                                                         |
| Operating temperature | -20°C ~ +40°C                                                                                           |
| Power Cable           | H05RN-K 2X1.0mm <sup>2</sup> L=0.5m (low voltage)<br>H05RN-K 3X1.0mm <sup>2</sup> L=0.5m (high voltage) |
| Mounting sleeve       | AS8 091 <sup>1</sup>                                                                                    |
| Dimmable Support      | <b>Triac PWM 1-10 Dali</b>                                                                              |


| Item     | Light source | Input voltage(V)  | Typical operating current(mA)  | Typical consumption(W)           | Typical luminance(lm)               | IK rate |
|----------|--------------|-------------------|--------------------------------|----------------------------------|-------------------------------------|---------|
| D1FC3634 | 36x0.1W      | 24V DC<br>120/240 | 24V =235<br>120V=99<br>240V=55 | 24V =5.5<br>120V=6.7<br>240V=6.5 | Cool white =113<br>Warm white =98.9 | 09      |

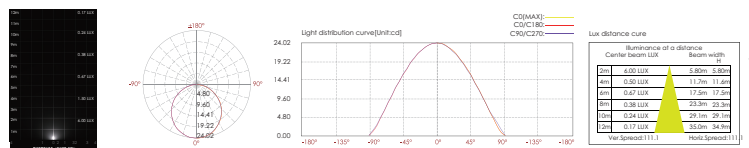


NEW 2016



## Recessed LED Stair Light and Wall Light



Outer Dimensions




Mounting sleeve 092<sup>®</sup>


Material specifications:

|                       |                                                                                                           |
|-----------------------|-----------------------------------------------------------------------------------------------------------|
| Housing               | 12° Die-casting grey powder coated aluminum.<br>T=60-80um Adhesion of ISO class 1/ASTM class 48           |
| Front cover           | 12° Die-casting aluminum <b>8AL7032</b> powder coated<br>T=60-80um Adhesion of ISO class 1/ASTM class 48; |
| LED                   | <b>SMD3030</b> type LED                                                                                   |
| Cable gland           | IP-67 copper and nickel coated                                                                            |
| Gasket                | Molding shaped silicone seal                                                                              |
| LED Driver            | Constant Voltage Input, Constant Current Output                                                           |
| Operating temperature | -20°C ~ 40°C                                                                                              |
| Power Cable           | HS05RN-F 2X1.0mm <sup>2</sup> L=0.5m (low voltage)<br>HS05RN-F 3X1.0mm <sup>2</sup> L=0.5m (high voltage) |
| Mounting sleeve       | ABS 092°                                                                                                  |
| Dimmable support      | <b>Triac PWM 1-10 Vdli</b>                                                                                |

## Front Cover Color Option



| Item     | Light source | Input voltage(V)  | Typical operating current(mA)        | Typical consumption(W)                | Typical luminance(lm)                  | IK rate |
|----------|--------------|-------------------|--------------------------------------|---------------------------------------|----------------------------------------|---------|
| D1HA1034 | 10x0.5W      | 24V DC<br>120/240 | 24V = 230<br>120V = 105<br>240V = 58 | 24V = 5.5<br>120V = 7.3<br>240V = 7.4 | Cool white =124.6<br>Warm white =112.9 | 10      |

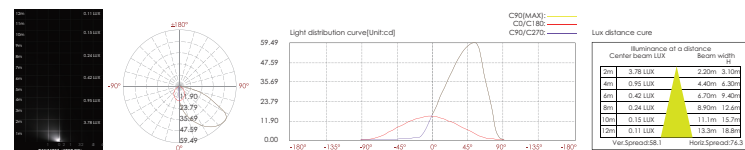

47