


Housing	12" Die-casting grey powder coated aluminum. 1460-80um Adhesion of 50 g/cm ² 1ASTM class 48
Front cover	12" Die-casting grey powder coated aluminum. 1460-80um Adhesion of 50 g/cm ² 1ASTM class 48
LED	SMD 3030 type LED
Cable gland	IP-67 copper and nickel coated
Gasket	Molding shaping silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C ~40°C
Power Cable	H05RN 2 X1.0mm ² L=5.0m (low voltage) H05RN 2 X1.0mm ² L=0.5m (high voltage)
Mounting base	ABS 091*
Dimmable support	Triac PWM 1-10 Volt


Basic	Secondary	
Dark Grey RAL 7037	Light Sanded Grey RAL 7038	Sanded Black RAL9005

Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D1F83634	36x0.1W	24V DC 120 / 240	24V = 235 120V = 100 240V = 55	24V = 5.5 120V = 6.7 240V = 6.6	Cool white =52.8 Warm white =46.7	09

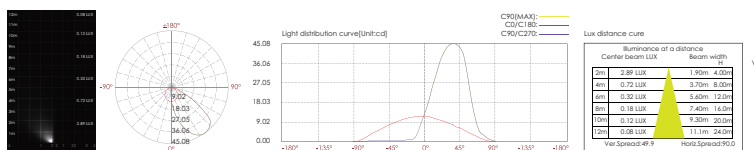


Recessed LED Wall Light

Stainless steel front cover with Matte Surface



Housing	12" Die-casting grey powder coated aluminum 76-80um Adhesion of ISO class 1/ASTM class 48
Front cover	Hard chromate plated Stainless steel 316*
LED	SMD3030 type LED
Cable gland	IP-47 copper and nickel coated
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input/Constant Current Output
Operating Temperature	-20°C~40°C
Power Cable	HO5RN-F 2X1.0mm² L=±0.5m (low voltage) HO5RN-F 3X1.0mm² L=±0.5m (high voltage)
Mounting sleeve	ABS 091 *
Dimmable support	Triac 091-1-10 Dali

Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	K.rat
D1FD3634	36x6.1W	24V DC 120/240	24V =235 120V=100 240V=46	24V =5.5 120V=4.7 240V=4.6	Cool white=52.8 Warm white=46.7	09

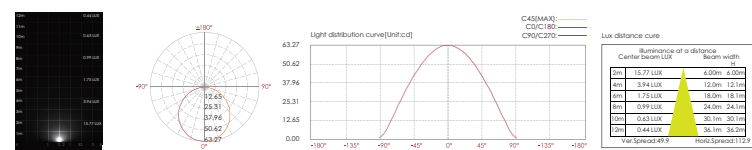

31