



NEW 2016



Recessed LED Stair Light and Wall Light

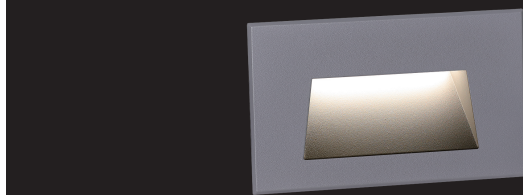


Outer Dimensions




Material specifications

Housing	12" Die-casting grey powder coated aluminum. T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	12" Die-casting aluminum RAL7037 powder coated T=20-30um Adhesion of ISO class 1/ASTM class 4B
LED	SMD3030 type LED
Cable gland	IP-67 copper and nickel coated
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	ABS 091*
Dimmable Support	Triac PWM 1-10 Dim

Front Cover Color Option



Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D1FF2034	20×0.2W	24V DC 120/240	24V = 227 120V = 101 240V = 56	24V = 5.6 120V = 6.8 240V = 6.7	Cool white =113.7 Warm white =104.3	10

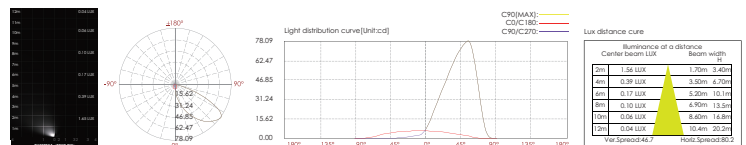

26


NEW 2016



Recessed LED Stair Light and Wall Light



Outer Dimensions

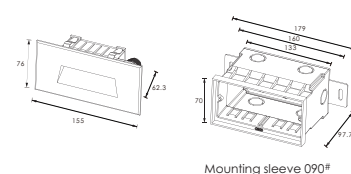


Mounting sleeve 090*


Material specifications

Housing	12" Die-casting grey powder coated aluminum. T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	12" Die-casting aluminum RAL7037 powder coated T=20-30um Adhesion of ISO class 1/ASTM class 4B; D1FC3634/316L stainless steel 316L
LED	SMD3030 type LED
Cable gland	IP-67 copper and nickel coated
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	ABS 090*
Dimmable Support	Triac PWM 1-10 Dim

Front Cover Color Option



Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D1CG0734	7×0.5W	24V DC 120/240	24V = 150 120V = 72 240V = 40	24V = 3.5 120V = 4.8 240V = 4.8	Cool white =104.5 Warm white =97.9	10

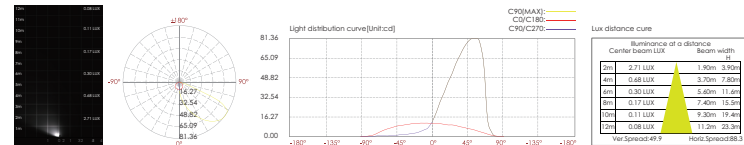

27