LED Colour Temperature

2000K
3000K
6000K

Optics

N/A

Material specifications

Housing	12# Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chrome-plated Stainless steel 316#
Light Window	PC T=3mm
Cable gland	IP-68 PG-9 PVC
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m (low voltage) H05RN-F 3X1.0mm² L=0.5m (high voltage)
Mounting sleeve	ABS 074#
Dimmable Support	**Triac PWM 1-10 Dali**

Outer Dimensions

Unit:mm



Mounting sleeve 074#

Mounting sleeve characteristic

The right picture-"A" is the supporting plate,used for "mounting sleeve" during the construction installation process to prevent deformation of the sleeve.

The loading way such as A1, A2

Please take out the supporting plate (A1 & A2) from the "mounting box" before installation.



Item	Light source	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
D1BD5407	54×SMD 2835	24V DC 120/240	24V = 220 120V = 95 240V = 53	24V = 5.3 120V = 6.7 240V = 6.8	Cool white =141 Warm white =132	09





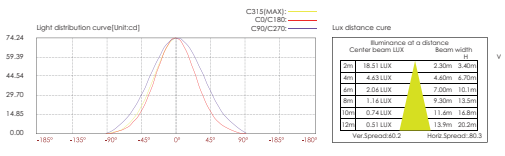

Recessed LED

Diffused Beam Stair Light and Wall Light

Stainless Steel Front Cover

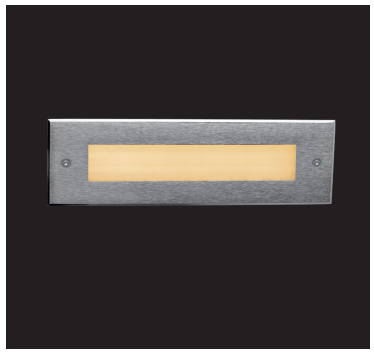

LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics

- N/A

Outer Dimensions

Unit:mm

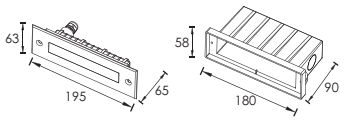

076# Mounting sleeve

Material specifications

Housing	12# Die-casting grey powder coated aluminum. T=60-80μm Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chrome-plated stainless steel SUS 316L#
Light Window	Step tempered glass.T=8mm
Cable gland	IP-68 PG-9 PVC
Gasket	Tooling shaped seal
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m (low voltage) H05RN-F 3X1.0mm² L=0.5m (high voltage)
Mounting sleeve	ABS 076#
Dimmable Support	**Triac PWM 1-10 Dali**

Mounting sleeve characteristic

•The Right picture – the supporting plate "A" is used for preventing deformation of the sleeve during the construction installation process.

•Please remove the supporting plate "A" from the mounting sleeve before the lamp installation.



Item	Light source	The manufacturer selected lens degree(°)91/2	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
D1FL1014	10×SMD3030	120°	24V DC 120/240	24V = 50 120V = 27 240V = 17	24V = 1.2 120V = 1.7 240V = 1.8	Cool white =34 Warm white =22	09