





NEW 2016

Recessed LED Stair Light and Wall Light

LED Colour Temperature	Optics
2000K 3000K 6000K	N/A

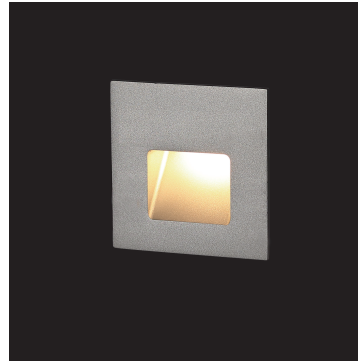


Material specifications

Housing	12# Die-casting aluminum T=20-25μm Adhesion of ISO class I / ASTM class 4B high temperature painting
Light Source	OSRAM LED
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	139# Zinc plated mounting sleeve grey powder Coated, T=60-80μm Adhesion of ISO class I / ASTM class 4B
Dimmable Support	Triac PWM 1-10 Dim

Front Cover Color Option

Basic	Secondary
Dark Grey RAL 7037	Silver Resistant Paint RAL 9006
	Sanded Black RAL 9005

Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D1GA0334	3x0.5W	24V DC 120V/240	24V = 110 120V = 48 240V = 28	24V = 2.6 120V = 3.1 240V = 3.0	Cool white =24 Warm white =20	10

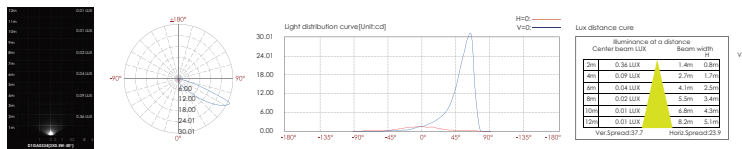


56



NEW 2016

Recessed LED Stair Light and Wall Light

LED Colour Temperature	Optics
2000K 3000K 6000K	N/A

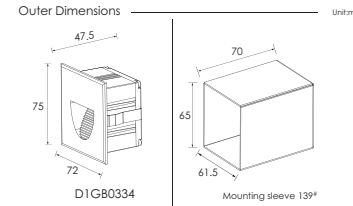


Material specifications

Housing	12# Die-casting aluminum T=20-25μm Adhesion of ISO class I / ASTM class 4B high temperature painting
Light Source	OSRAM LED
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	139# Zinc plated mounting sleeve grey powder Coated, T=60-80μm Adhesion of ISO class I / ASTM class 4B
Dimmable Support	Triac PWM 1-10 Dim

Front Cover Color Option

Basic	Secondary
Dark Grey RAL 7037	Silver Resistant Paint RAL 9006
	Sanded Black RAL 9005

Item	Light source	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D1GB0334	3x0.5W	24V DC 120V/240	24V = 110 120V = 48 240V = 28	24V = 2.6 120V = 3.0 240V = 3.0	Cool white =35 Warm white =30	10

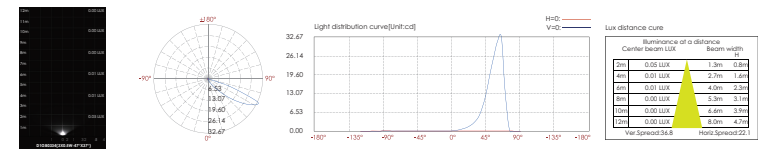

57