




Recessed LED Wall Recessed Outline Light

| LED Colour Temperature | Optics |
|-------------------------|--------|
| 2000K 3000K 6000K | N/A |



Outer Dimensions





Unit:mm


Material specifications

| | |
|-----------------------|---|
| Housing | 12° Die-casting grey powder coated aluminum. T=40-80µm Adhesion of ISO class 1/ASTM class 4B |
| Front ring | Hard chrome-plated Staines steel SUS 316* |
| Lens | Optical Glass |
| Operating temperature | -20°C~40°C |
| Waterproof seal | Rubber seal |
| Mounting sleeve | ABS 035* |
| Dimmable Support | Triac PWM 1-10 Dali |

Mounting sleeve characteristic

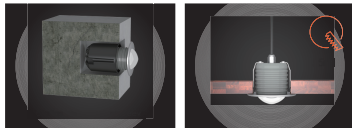


| Item | Light source | Lens | The manufacturer selected lens degree(°)θ1/2 | Input voltage(V) | Typical operating current(mA) | Typical consumption(w) | Typical luminance(lm) | IK rate |
|----------|--------------|-------------|--|-------------------|-------------------------------------|---------------------------------------|----------------------------------|---------|
| D1UA0102 | 1x3W | L0145F042KP | 45° | 24V DC 120/240 | 24V = 110 120V = 48 240V = 28 | 24V = 2.6 120V = 3.1 240V = 3.0 | Cool white =31 Warm white =27 | 09 |

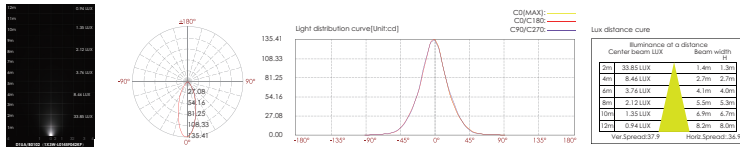


Recessed LED Wall Light

| LED Colour Temperature | Optics |
|-------------------------------|--------|
| • 2000K • 3000K • 6000K | • N/A |



Outer Dimensions

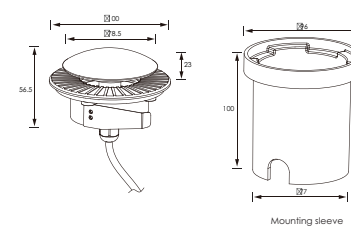

Unit:mm

Material specifications

| | |
|-----------------------|--|
| Housing | Grey powder coated aluminum.T=40-80µm Adhesion of ISO class 1/ASTM class 4B |
| Light Window | Step tempered glass.T=1.0mm |
| Operating temperature | -20°C~40°C |
| Power Cable | H05RN-F 2X1.0mm² L=0.5m(low voltage) H05RN-F 3X1.0mm² L=0.5m(high voltage) |
| Mounting sleeve | Mounting sleeve 034* |
| Dimmable Support | Triac PWM 1-10 Dali |

Front Cover Color Option

| Basic | Secondary |
|-----------------------|-------------------------------|
| Dark Grey RAL 7037 | Light Sanded Grey RAL 7038 |
| | Sanded Black RAL 9005 |



| Item | Light source | Input voltage(V) | Typical operating current(mA) | Typical consumption(w) | Typical luminance(lm) | IK rate |
|----------|--------------|------------------|-------------------------------|------------------------|----------------------------------|---------|
| D1MA1214 | 10xSMD5050 | 24V DC | 24V = 250 | 24V = 6 | Cool white =34 Warm white =22 | 09 |

