




Recessed RGB LED Wall
Outline Light




- LED Wave Length
- R = 620-630 nm
 - G = 520-530 nm
 - B = 460-470 nm
- Optics
- N/A

Outer Dimensions



Mounting sleeve 035*

Mounting sleeve characteristic



Material specifications

Housing	12* Die-casting grey powder coated aluminum. T=60-50µm Adhesion of 80 class 1/ASTM class 48
Front ring	Hard chromeplated Staines steel SUS 316*
Lens	Optical Glass
Operating temperature	-20°C~40°C
Waterproof seal	Rubber seal
Mounting sleeve	ABS 035*




Recessed RGB LED Wall
Outline Light



- LED Wave Length
- R = 620-630 nm
 - G = 520-530 nm
 - B = 460-470 nm
- Optics
- N/A


Outer Dimensions




Material specifications

Housing	12* Die-casting grey powder coated aluminum. T=60-50µm Adhesion of 80 class 1/ASTM class 48
Front ring	Hard chromeplated Staines steel SUS 316*
Lens	Optical Glass
Operating temperature	-20°C~40°C
Waterproof seal	Rubber seal
Mounting sleeve	ABS 035*

Mounting sleeve characteristic



Item	Light source	Lens	The manufacturer selected lens degree(°)B1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D1UA0106	1×3W RGB 3in1 Full color	L0145F042KP	45°	24V DC	R = 38 G = 53 B = 54	3.5	46	09

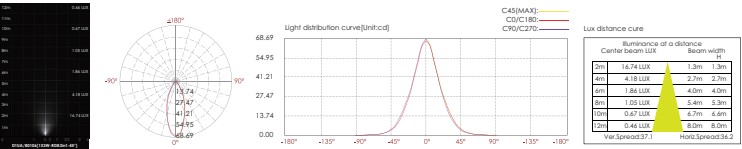

Item	Light source	Lens	The manufacturer selected lens degree(°)B1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D1UB0106	1×3W RGB 3in1 Full color	L0145F042KP	45°	24V DC	R = 38 G = 53 B = 54	3.5	46	09

