

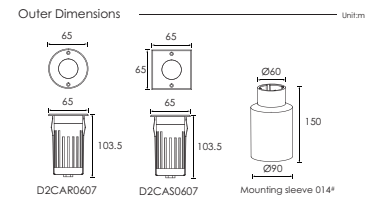


| Material specifications |                                                                                                       |
|-------------------------|-------------------------------------------------------------------------------------------------------|
| Housing                 | 12" Die-casting dark grey powder coated aluminum.<br>T=60-80µm, Adhesion of ISO class 1/ASTM class 4B |
| Front ring              | Hard chrome plated stainless steel SUS 316*                                                           |
| Light Window            | Tempered frosted step glass, T=7mm                                                                    |
| Glass pressure capacity | Full area=1106kgs                                                                                     |
| Operating temperature   | -20°C~40°C                                                                                            |
| Power Cable             | H05RN-F 2X1.0mm² L=0.5m(low voltage)<br>H05RN-F 3X1.0mm² L=0.5m(high voltage)                         |
| Dimmable Support        | Triac PWM 1-10 Dim                                                                                    |

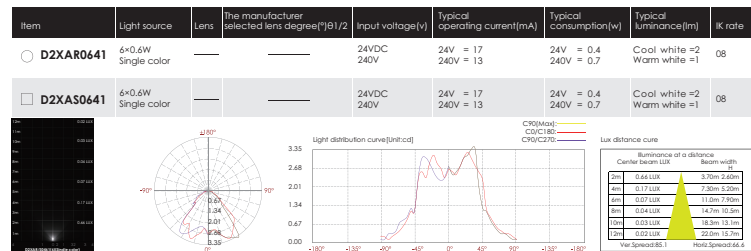

| Material specifications |                                                                                                  |
|-------------------------|--------------------------------------------------------------------------------------------------|
| Housing                 | 12" Die-casting grey powder coated aluminum.<br>T=60-80µm, Adhesion of ISO class 1/ASTM class 4B |
| Front cover             | Hard chrome plated stainless steel SUS 316*                                                      |
| Light Window            | Tempered frosted step glass, T=5mm                                                               |
| Glass pressure capacity | Full area=783kgs                                                                                 |
| Gasket                  | Molding shaped silicone seal                                                                     |
| LED Driver              | Constant Voltage Input, Constant Current Output                                                  |
| Operating temperature   | -20°C~40°C                                                                                       |
| Power Cable             | H05RN-F 2X1.0mm² L=0.5m(low voltage)<br>H05RN-F 3X1.0mm² L=0.5m(high voltage)                    |
| Mounting sleeve         | ABS 014*                                                                                         |
| Dimmable Support        | Triac PWM 1-10 Dim                                                                               |

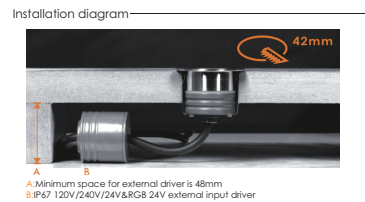