





Diffuser
Tiny Type LED Inground Light
 Stainless Steel Front Cover



- LED Colour Temperature
- 2000K
 - 3000K
 - 6000K
- Optics
- N/A

Outer Dimensions



Material specifications

Housing	12° Die-casting grey powder coated aluminum, T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chromeplated Stainless steel SUS 316L*
Light Window	Tempered frosted step glass, T=5mm
LED	OSRAM or NICHIA
Glass pressure capacity	Full area=254kgs
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m(low voltage)
Mounting sleeve	ABS 032*
Dimmable Support	Triac PWM 1-10 Dall




Up light
Tiny Type LED Inground Light
 Stainless Steel Front Cover




NEW 2016

- LED Colour Temperature
- 2000K
 - 3000K
 - 6000K
- Optics
- B27
- 0100R0201TY 9°
 - 0101R0201TY 13°
 - 0102R0201TY 25°
 - 0103R0201TY 30°




Outer Dimensions



Material specifications

Housing	12° Die-casting grey powder coated aluminum, T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Front cover	Hard chromeplated Stainless steel SUS 316L*
Light Window	Tempered frosted step glass, T=5mm
LED	OSRAM or NICHIA
Glass pressure capacity	Full area=254kgs
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m(low voltage)
Mounting sleeve	ABS 033*
Dimmable Support	Triac PWM 1-10 Dall

Item	Light source	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
○ D2YBR0134	1×0.5W NICHIA	24V DC	26	0.6	Cool white=11.0 Warm white=9.60	06
□ D2YBS0134	1×0.5W NICHIA	24V DC	26	0.6	Cool white=11.0 Warm white=9.60	06

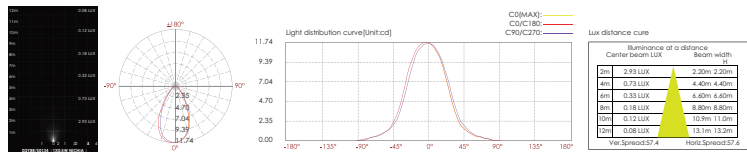

Item	Light source	The manufacturer selected lens degree(°)B1/2	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
○ B2YCR0157	1×2.0W OSRAM	25°	24V DC	110	2.5	Cool white=120 Warm white=135	06

