




Single Side



Outer Dimensions



Item	Light source	Lens	The manufacturer selected lens degree(°)B1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
R7AF0126	1 x 6W COB	R5	25°	24V DC 120/240	24V = 270 120V = 65 240V = 37	24V = 6.5 120V = 7.7 240V = 7.8	Cool white =745 Warm white =651	06

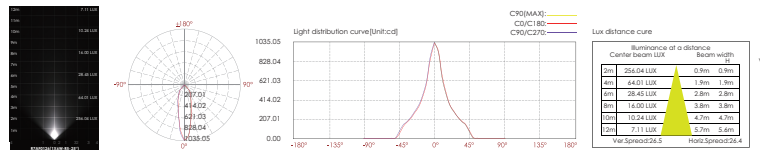

Wall Mounting Landscape Light


LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics

R5
R0118C044XL 18°
R0125C044XL 25°
R0140C044XL 40°

R5



18° 25° 40°

Material specifications

Housing	12# Die-casting dark grey powder coated aluminum. T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Cover	PC T=6mm
Gasket	Tooling shaped seal
Driver	Main voltage 100V-240V driver inside builded
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2x1.0mm2 L=0.3m(low voltage) H05RN-F 3x1.0mm2 L=0.3m(high voltage)

Housing color option

Sanded Brown RAL 8019	Sanded Black RAL 9005	Silver Resistant Paint RAL 9006



Wall Mounting Landscape Light



LED Colour Temperature

- 2000K
- 3000K
- 6000K

Optics

N/A

Outer Dimensions



Item	Light source	Lens	The manufacturer selected lens degree(°)B1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D7AB0237	2 x 3W NICHIA	—	—	24V DC 120/240	24V = 268 120V = 138 240V = 73	24V = 6.20 120V = 8.80 240V = 8.60	2x155	06

