




Double side




Wall Mounting Landscape Light

LED Colour Temperature Optics

- 2000K
- 3000K
- 6000K

N/A


Outer Dimensions Unit:mm




Material specifications

Housing	12# Die-casting dark grey powder coated aluminum. T=60-80µm,Adhesion of ISO class I/ASTM class 48
Cover	PC T=6mm
Gasket	Tooling shaped seal
Driver	Main voltage 100V-240V driver inside bulided
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2×1.0mm ² L=0.3m(low voltage) H05RN-F 3×1.0mm ² L=0.3m(high voltage)

Housing color option



Item	Light source	Lens	The manufacturer selected lens degree(°)(θ1/2)	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
D7AC0237	2×3W NICHIA			24VDC 120/240	24V = 268 120V = 138 240V = 73	24V = 6.20 120V = 8.80 240V = 8.90		06

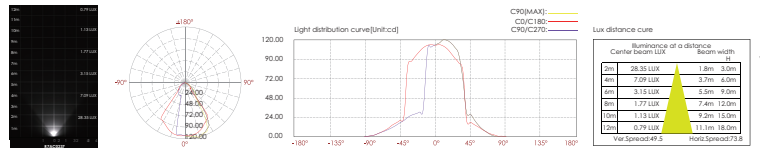

300




Wall Mounting Landscape Light

LED Colour Temperature Optics


- 2000K
- 3000K
- 6000K

N/A

Double side




Outer Dimensions Unit:mm




Material specifications

Housing	12# Die-casting dark grey powder coated aluminum. T=60-80µm,Adhesion of ISO class I/ASTM class 48
Cover	PC T=6mm
Gasket	Tooling shaped seal
Driver	Main voltage 100V-240V driver inside bulided
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2×1.0mm ² L=0.3m(low voltage) H05RN-F 3×1.0mm ² L=0.3m(high voltage)

Housing color option



Item	Light source	Lens	The manufacturer selected lens degree(°)(θ1/2)	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
D7AD0237	2×3W NICHIA			24V DC 120/240	24V = 268 120V = 138 240V = 73	24V = 6.20 120V = 8.80 240V = 8.90		06

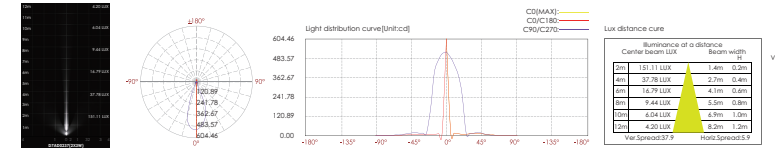

301