

Features:

- ◆The whole Aluminum Lamp is an integrated Design, highly effective solve the problem of the LED heat dissipation
- ◆Modular design, maintenance is simple and convenient
- ◆Sides and bottom with mesh design, greatly enhance its capability of convection heat dissipation

Technical Parameters:


Light Source:	High Power LED
LED Type:	SMD3030
LED Color:	Warm White , Nature White, Pure White
PF:	≥0.92
Input Voltage:	AC90~265V/50~60Hz
IP Rate:	IP66
Environment Temperature:	-20℃~50℃
Storage Temperature:	-40℃~70℃
Working Life:	≥145000 hrs

Structure Parameter:


Lamp Body:	Aluminum alloy lamp body extrusion/surface coated with high temperature
Cover Material:	PC lens

Application | Tunnel, Factory, Stadium, Warehouse, hall, auditorium, etc.


Product Dimension

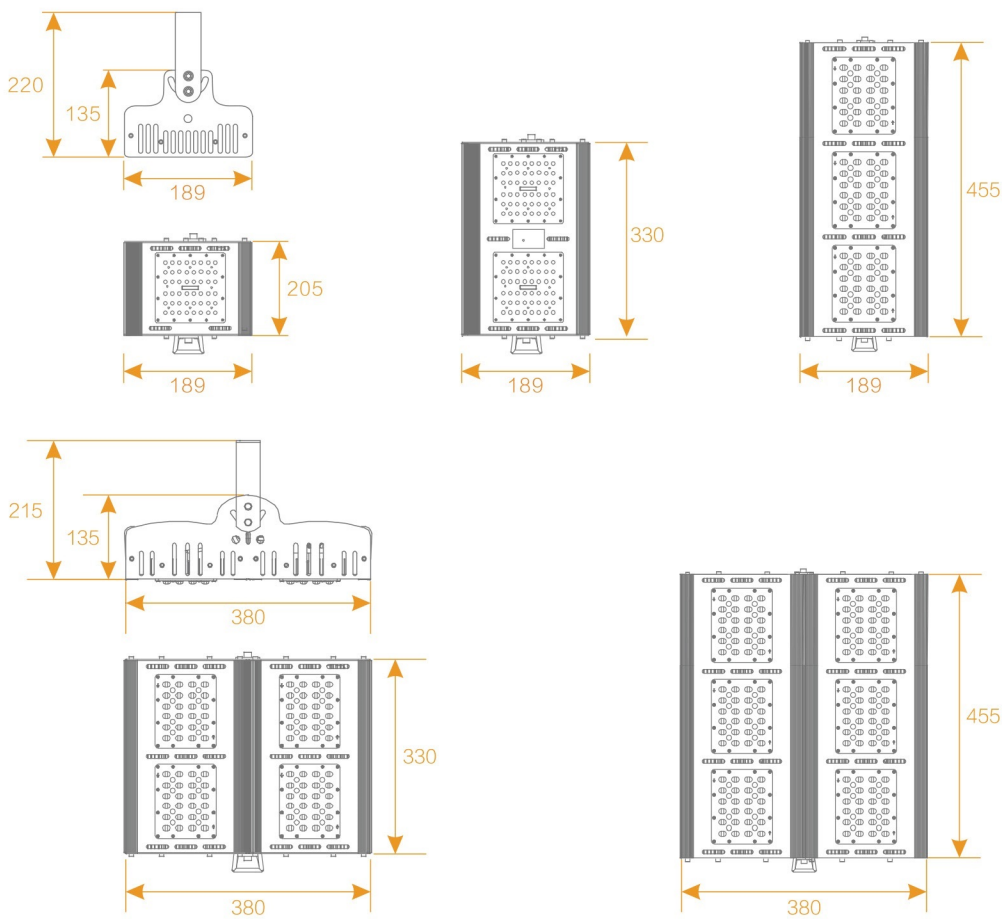

Light Distribution

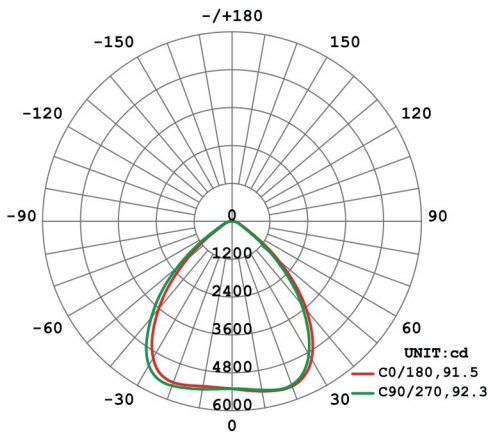

CAAI figure

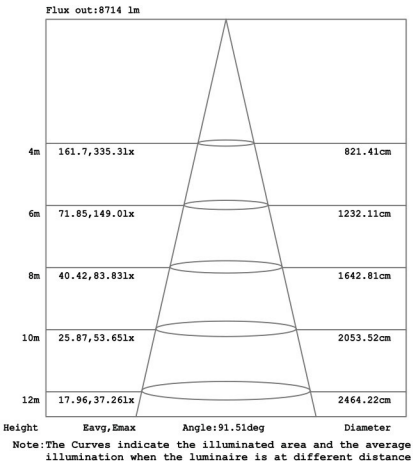

Parameter							
Model No.	Power	Size(mm)	Voltage	LED Qty	Luminous Efficiency	CRI	Beam Angle
KS.TL40W.E-1	40W	L205*W189*H220	AC90~265V 50~60Hz	48	110Lm/W	Ra≥80	40°
KS.TL80W.E-1	80W	L330*W189*H220		96			
KS.TL120W.E-1	120W	L455*W189*H220		144			
KS.TL160W.E-2	160W	L330*W380*H215		192			
KS.TL240W.E-2	240W	L455*W380*H215		288			