




NEW 2016

Recessed LED Stair Light & Wall Light



LED Colour Temperature		Optics	
2000K 3000K 6000K		- R7 - R0124C035XL 24° - B44 - L0120D023RT 20° - B34D - L0122F023YH 22°	
R7 		B44 	
B34D 		20° 	
18° 		22° 	

Outer Dimensions

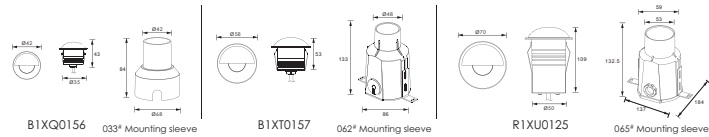


Item	Light source	Lens	The manufacturer selected lens degree(°)B1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
B1XQ0156	1x1W	B44	40°	24V DC	54	1.3	Cool white =28 Warm white =23	10
B1XT0157	1x2W	B34D	22°	24V DC	108	2.6	Cool white =60 Warm white =51	10
R1XU0125	1x 5W COB	R7	24°	24V DC 120/240	24V = 265 120V = 52 240V = 32	24V = 6.3 120V = 6.0 240V = 6.0	Cool white =237 Warm white =208	10


Material specifications

Housing&Front cover	12" Die-casting dark grey powder coated aluminum,140-50um,Adhesion of BCO class 1/ASTM class 4B
Light Window	Step tempered clear glass,T=4mm
Loading capacity	>2000kg
Cable gland	IP-67 copper and nicked coated
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input,Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm² L=0.5m(low voltage) H05RN-F 3X1.0mm² L=0.5m(High voltage)
Mounting sleeve	A85 033° 062° 065°
Dimmable Support	Triac PWM 1-10 Dal


Unit:mm

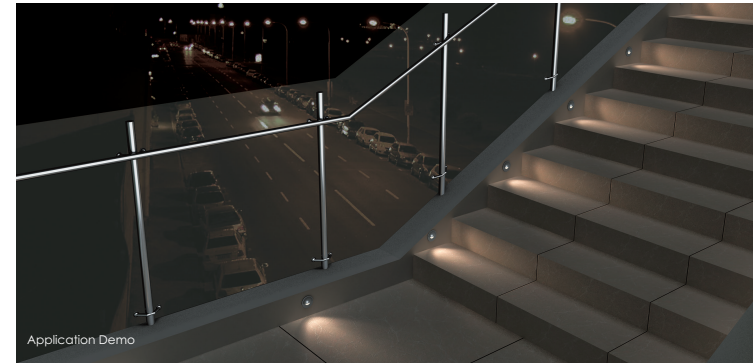

B1XQ0156

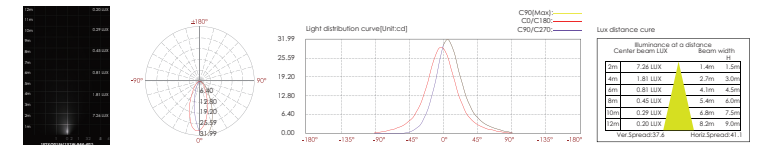

B1XT0157

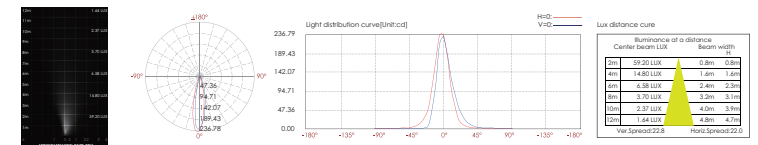

R1XU0125

