



High Luminance Output
Inground Flood Light




OUTER DIMENSIONS & ACCESSORIES Unit:mm

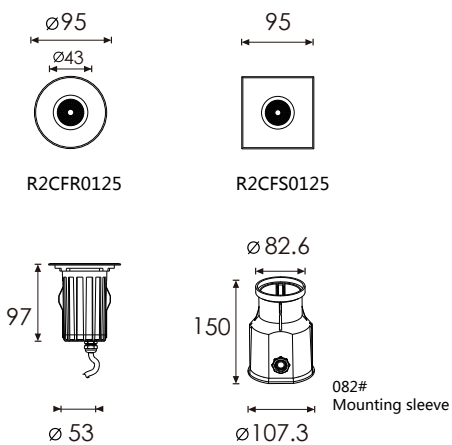

OPTIONAL HONEYCOMB LOUVER

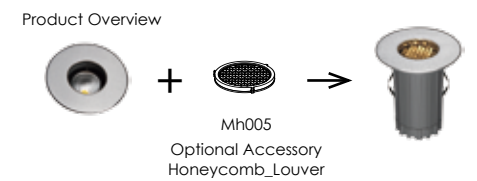


TECHNICAL DATA									
ITEM	LIGHT SOURCE	REFLECTOR	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK	
R2CFR0125	1×5W COB	R7	10°/30°/LN	24V DC 120/240	24V = 265	24V = 6.3	4000K,6500K = 120lm/W 2700K,3000K = 120lm/W	10	
					120V = 52	120V = 6			
					240V = 34	240V = 6.8			

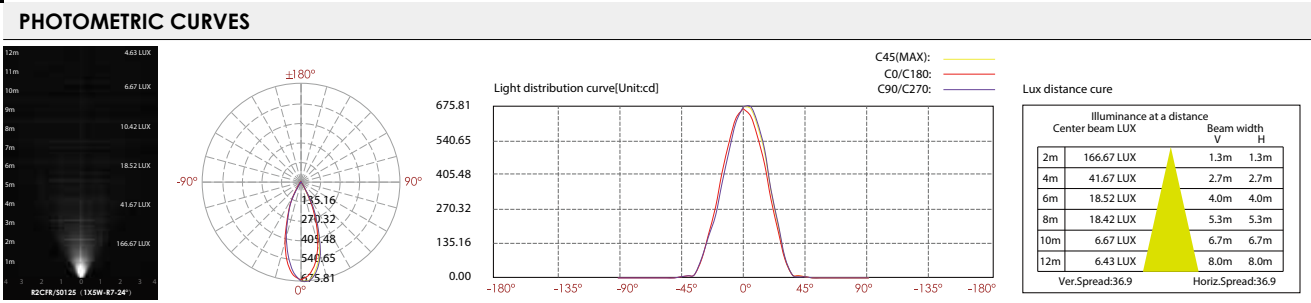

LED COLOUR TEMPERATURE

2700K · 3000K 4000K 6000K

OPTICS

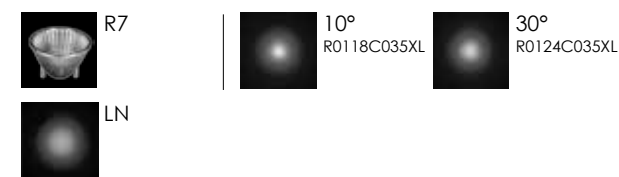


MATERIAL SPECIFICATIONS

HOUSING	12# Die-casting dark grey powder coated aluminum T=60-80µm Adhesion of ISO class 1/ATM class 4B
FRONT COVER	Hard chrome-plated stainless steel SUS 316L#
LIGHT WINDOW	Tempered frosted step glass.T=6mm
REFLECTOR	Optical Reflector efficiency≥90%
LED	COB
GLASS PRESSURE CAPACITY	Full Area=1195kgs
CABLE GLAND	IP68 PG-9 PA66
GASKET	Molding shaped seal
LED DRIVER	Constant Voltage Input,Constant Current Output
OPERATING TEMPERATURE	-20°C~50°C
POWER CABLE	H05RN-F 2X1.0mm2 L=0.5m(low voltage) H05RN-F 3X1.0mm2 L=0.5m(high voltage)
MOUNTING SLEEVE	ABS 082#


High Luminance Output
Inground Flood Light



OUTER DIMENSIONS & ACCESSORIES Unit:mm

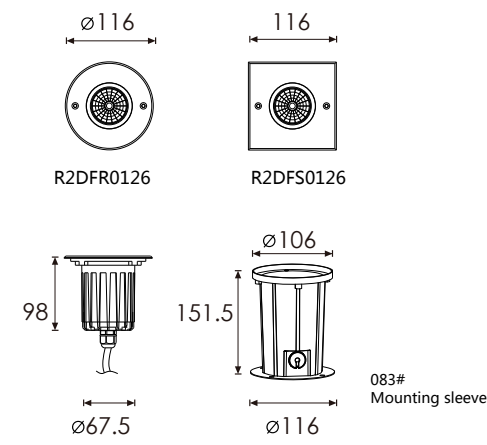

OPTIONAL HONEYCOMB LOUVER

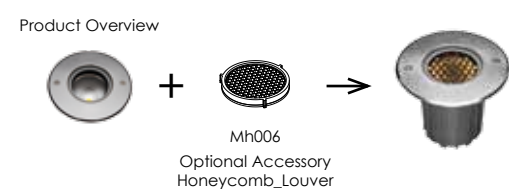

TECHNICAL DATA									
ITEM	LIGHT SOURCE	REFLECTOR	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK	
R2DFR0126 R2DFS0126	1×7W COB	R8	10°/30°/LN	24V DC 120/240	24V = 324	24V = 7.7	4000K,6500K = 120lm/W 2700K,3000K = 120lm/W	10	
					120V = 72	120V = 8.5			
					240V = 40	240V = 8.5			

