IP65 | RoHS COMPLIANT | CE

Wall Mounting Landscape Light

R7BA0128

R7BB0227

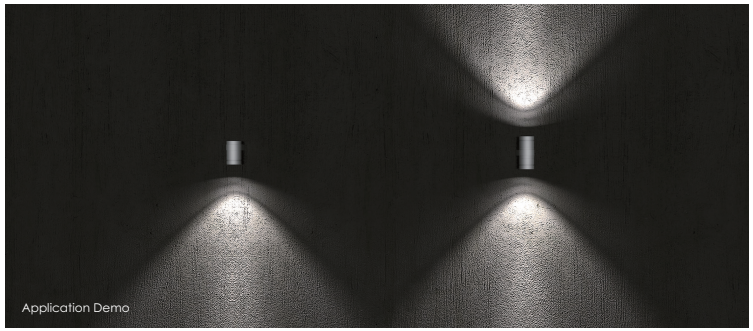

Outer Dimensions

Unit:mm



R7BA0128



R7BB0227

Material specifications

Housing	12# Die-casting dark grey powder coated aluminum. T=60-80μm.Adhesion of ISO class 1/ASTM class 4B
Reflector	Optical Reflector, efficiency≥85%
Light Window	Tempered glass.T=6mm
LED Driver	Constant Voltage Input,Constant Current Output
LED	NICHIA
Power Cable	H05RN-F 2X1.0mm² L=0.3m(low voltage) H05RN-F 3X1.0mm² L=0.3m(High voltage)
Operating temperature	-20°C~40°C

Housing color option

Sanded Brown RAL 8019	Sanded Black RAL 9005	Silver Resistant Paint RAL 9006

Item	Light source	Reflector	The manufacturer selected lens degree(°)θ1/2	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)
R7BA0128	1×10W COB	R8	24°	24V DC 120/240	24V = 480 120V = 107 240V = 60	24V = 11.5 120V = 12.6 240V = 12.6	Cool white =1018 Warm white = 956
R7BB0227	2×8W COB	R8	24°	24V DC 120/240	24V = 822 120V = 182 240V = 103	24V = 19.7 120V = 21.0 240V = 21.0	Cool white =1018x2 Warm white = 956x2

LED Colour Temperature

- 3000K
- 6000K

Optics

R8
R0115C050XL 15°
R0124C050XL 24°
R0138C050XL 38°
R0150C050XL 50°

R8


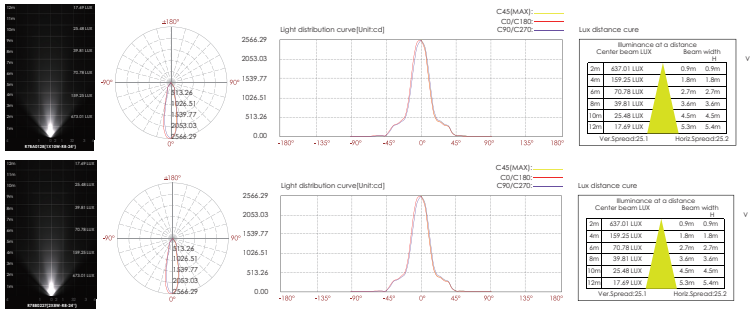
15° 24° 38° 60°