




NEW 2016



Outer Dimensions Unit:mm



Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
B8CJ0657	6×2W	B33D	30°	24V DC 120/240	2.4 V = 562 120V = 100 240V = 56	2.4 V = 13.5 120V = 12.0 240V = 12.2	Cool white =830 Warm white =681	06

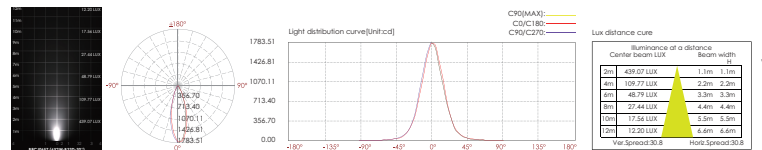


314



Wall Mounting Ceiling Down Light

LED Colour Temperature	Optics
3000K 6000K	- B33(B33D/B33F) - L0109R023YH 9° - L0115D023YH 15° - L0120D023YH 20° - L0130D023YH 30° - L0145D023YH45°



Material specifications

Housing Material	Extruded aluminum alloy #6063
Painting	Powder coating T= 60-80 um./Adhesion of ISO class 1/ASTM class 4B
Reflector	Optical reflector, efficiency>85%
LED	NICHIA
Power Cable	H05RN-F 2X1.0mm² L=0.3m(low voltage) H05RN-F 3X1.0mm² L=0.3m(High voltage)
Operating temperature	-20°C~40°C

Housing Color Option

Basic	Secondary
Dark Grey RAL 7037	Silver Resistant Paint RAL 9006
	Sanded Black RAL 9005





COB Wall Mounting Ceiling Down Light


LED Colour Temperature	Optics
3000K 6000K	- R27 - R0110C075AL 10°



Outer Dimensions Unit:mm

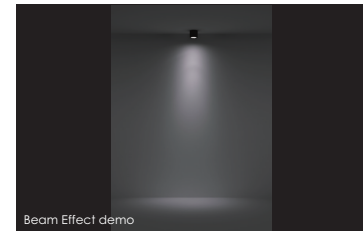

Item	Light source	Reflector	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
R8CJ0127	1×8W COB	R27	35°	24V DC 120/240	2.4 V = 411 120V = 88 240V = 50	2.4 V = 9.8 120V = 10.8 240V = 10.8	Cool white =850 Warm white =748	06

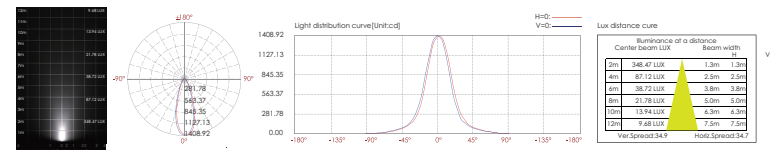

315