

Ceiling Lights

1.Recessed Downlights



Features

- Innovative and high performance outdoor downlight with IP65/ IK08 protection.
- The series is designed with separated A type or intergrated gear box B type for different hight ceiling.
- ODG-10XA series with 50cm H05RN-F cable outlet.
- Different lumen package, good for home and commercial project requirement.
- Transparent glass on the front is very easy clean.
- Different beam angle reflectors ready for customer to choose.
- Delicate mechanical design and sufficient heat management guarantee long lifespan.
- Eco-friendly technology of CoB with energy saving and low maintenance cost.
- Deep waffle frame provide better glaring control, 30 degree cut-off angle.
- Easy installation by two bracket on the sides, no screw seeable on the front.
- Eco-friendly CoB technology with energy saving and low maintenance cost.
- Installation box and honey comb accessory available on request.

Application

LED recessed downlight for passages, balcony, villa and light around the house.

MATERIAL


HOUSING
Aluminium, paint.

REFLECTOR
Pure aluminium layer 99.9%.

ACCESSORIES

			
ODG-106	AC-984C	AC-984D	AC-984E
ODG-108	AC0-208H	AC0-208S	AC0-208M

EASY INSTALLATION

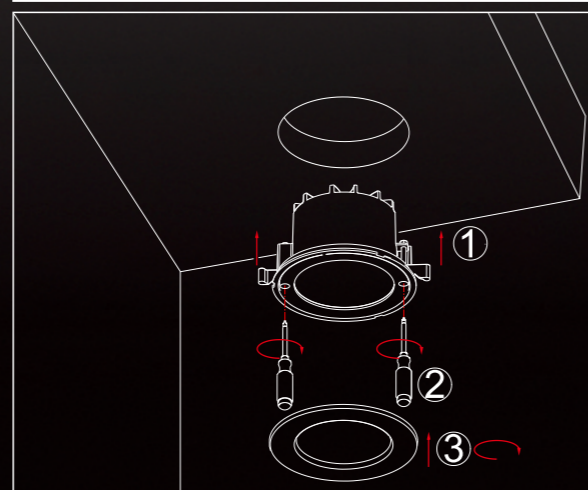

ODG-106A
(1000lm)
(1500lm)
(* 2100lm)



ODG-108A
(2500lm)
(* 3400lm)



ODG-106B
(1000lm)
(1500lm)
(* 2100lm)




ODG-108B
(2500lm)
(* 3400lm)




DIFFERENCE BETWEEN A TYPE AND B TYPE

A series are for lower housing series , external independent driver, good for limited ceilings




ODG-10XA Series

B series are for intergrated gear box housing , easy for installation.




ODG-10XB Series

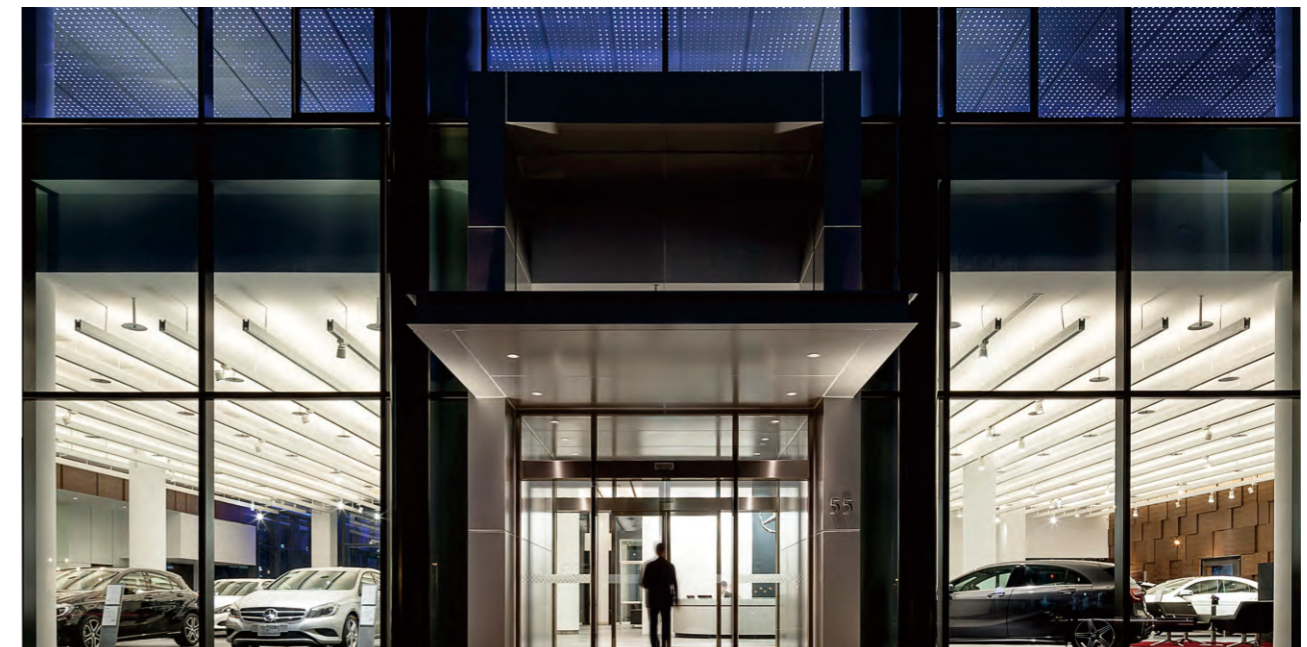


Ceiling Lights

COLOR : WK BJ SB LED COLOR : WW NW

1.Recessed Downlights



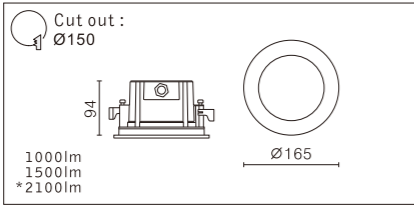



Cut out :
Ø150


1000lm
1500lm
*2100lm

LAMP: CITIZEN CoB

POWER:
*17.5W (500mA, 35V)
*2100lm for standard application

ODG-106A

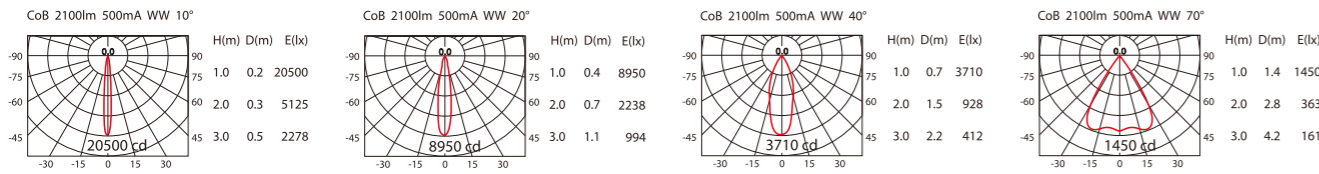

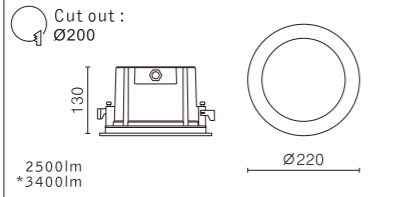

Cut out :
Ø200


2500lm
*3400lm

LAMP: CITIZEN CoB

POWER:
*25.5W (700mA, 36V)
*3400lm for standard application

ODG-108A

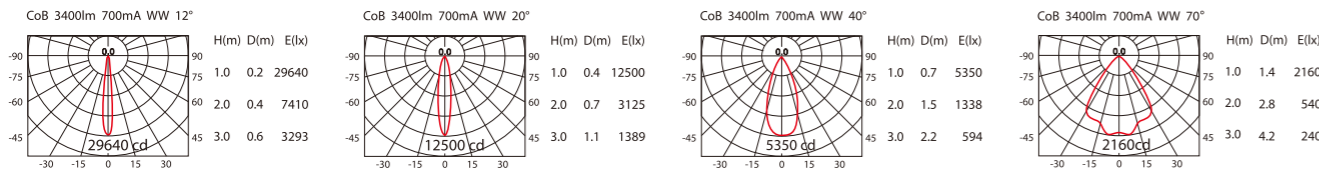

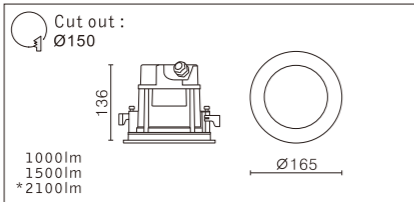Cut out :
Ø150


1000lm
1500lm
*2100lm

LAMP: CITIZEN CoB


POWER:
*17.5W (500mA, 35V)
*2100lm for standard application


INPUT: AC 100 - 240V

ODG-106B

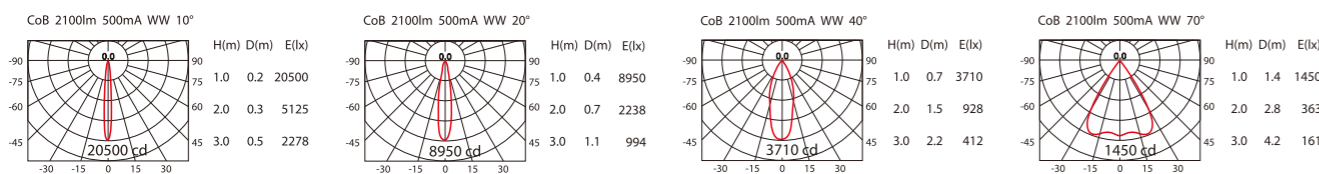

COLOR : WK BJ SB LED COLOR : WW NW



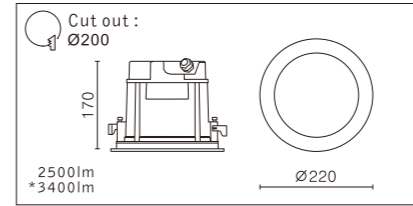

Cut out :
Ø200


2500lm
*3400lm

LAMP: CITIZEN CoB

POWER:
*25.5W (700mA, 36V)
*3400lm for standard application

INPUT: AC 100 - 240V

ODG-108B

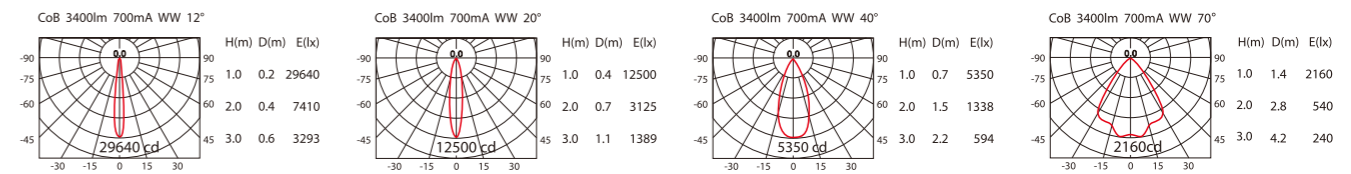

DRIVER AND WATERPROOF BOX

Optional	OTBK-TRH3 HEP LSC9W500P UNI	OTBK-TRH3 HEP LSC20W350P UNI	OTBK-TRH3 HEP LSC20W500HP UNI	OTBK-TRH1 HEP LCD36W700 UNI
1000lm	○			
1500lm		○		
2100lm			○	
2500lm			○	
3400lm				○

CEILING LIGHT INSTALLATION BOX

Optional	AC-106A (for ODG-106A)	AC-108A (for ODG-108A)
	